



IMI TA

TA Fast-Fit 4

Prefabricated solution
for terminal units

TA Fast-Fit 4 is our newest prefabricated product for use with small terminal units in both heating and cooling applications

Key advantages over traditional installations:



Faster installation on site



Easy setting and sizing with PIBCV ensures total control



Reducing the risk of leakage and installation errors



Time saving on system commissioning



Highly reliable



Easy Installation



Quick hydronic balancing



Precise flow control

Fully assembled and factory pressure tested to ensure reliability


Each unit comes ready to install and uniquely labelled saving time on site

The pressure independent solution provides direct setting of the max flow

The modulating version provides uniquely shaped EQM characteristic for best modulating control

TA Fast-Fit 4 – Prefabricated solution for terminal units


- Size Range ½" - 1¼" (DN15 – DN32 mm)
- Bypass (for flushing and isolation) / test-point / drain / strainer on flow
- PIBCV & Actuator on the return to aid with balancing & control

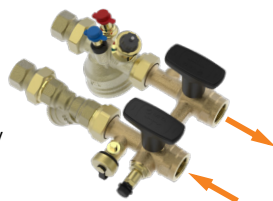


Operation Functions

Making system commissioning hassle-free


Normal operation

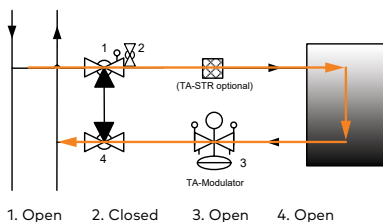


Back flushing

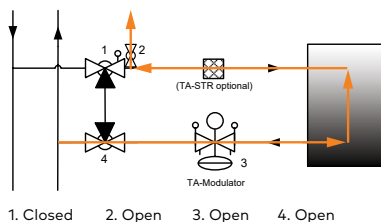

Flushing the distribution system

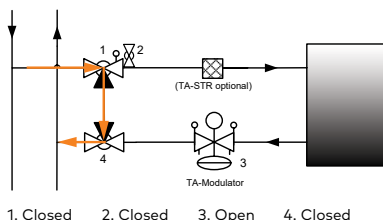

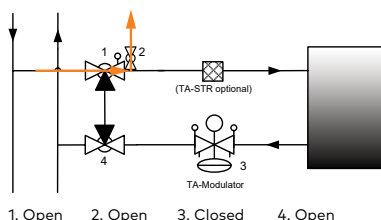


Forward flushing



Actuators

Selection of actuators available for the Fast-Fit 4 solution.

Actuator	Compatible TA Fast-Fit product
 TA-Slider 160 For Modulating Control	TA-Fast-Fit with PIBCV TA-Modulator DN15-32 TA-Fast-Fit with PIBCV TA-Compact-P DN10-32
 EMO TM For Modulating Control	TA-Fast-Fit with PIBCV TA-Compact-P DN10-32
 EMO T For On/Off Control	TA-Fast-Fit with PIBCV TA-Compact-P DN10-32

How can we help you?

