

Termotec



Manual radiator valves

Upgradeable manual radiator valves

*Engineering
GREAT Solutions*

Termotec

The Termotec upgradeable manual radiator valve is used in warm water pump heating systems, gravity or low pressure steam systems.

Key features

- > Double O-ring sealing
- > Non-rising spindle
- > Can be retrofitted as a thermostatic valve



Technical description

Termotec upgradeable manual radiator valves with white plastic handwheel cap, RAL 9016.

Body made of nickel plated brass.

Lengths according to DIN EN 215 Series F.

Non-rising spindle with double EPDM O-ring sealing.

Can be retrofitted as a thermostatic valve by replacing the Termotec insert with a thermostatic insert, see accessories. With a special tool (on request) this changing is possible under pressure.

Can be connected to a threaded pipe, or with compression fittings to a copper or precision steel pipe.


For Termotec, only use the auxiliary, labelled IMI Heimeier compression fittings (label e. g. 15 THE).

Permitted operating temperature TB 120°C (248°F).

Permitted operating pressure PB 10 bar, low pressure steam 110°C (230°F)/ 0.5 bar.

Construction

Termotec

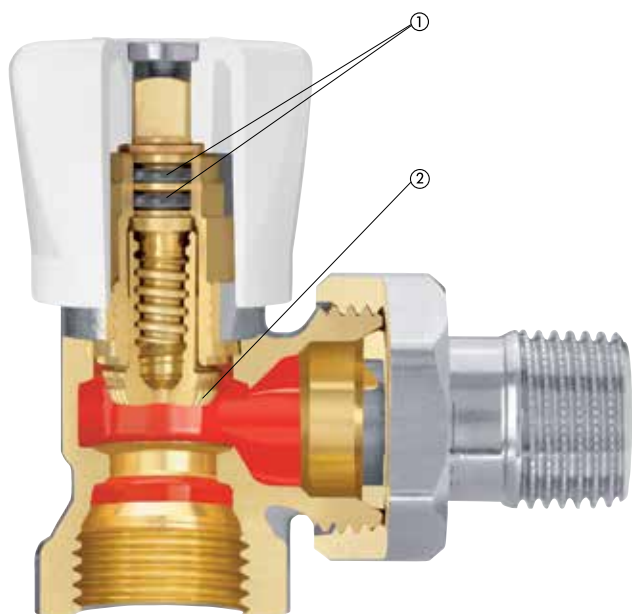

1. Double O-ring sealing
2. Regulation cone

Application

The Termotec upgradeable manual radiator valve is used in warm water pump heating systems, gravity or low pressure steam systems. With models in angle and straight form from DN 15 to DN 20, the manual radiator valve can be used for a number of different purposes.

Note


The contents of the heat transfer medium should comply with VDI guideline 2035 on damage and scale deposit formation in warm water heating systems.

For industrial and long-distance energy systems, see the applicable codes VdTÜV 1466 and AGFW FW 510. Mineral oils in the heat transfer medium or lubricants containing mineral oils of any type lead to strong swelling and in most cases cause EPDM seals to fail.

When using nitrite-free frost and corrosion resistance solutions

with an ethylene glycol base, pay close attention to the details outlined in the manufacturers' documentation, particularly details concerning concentration and specific additives.


Sample application

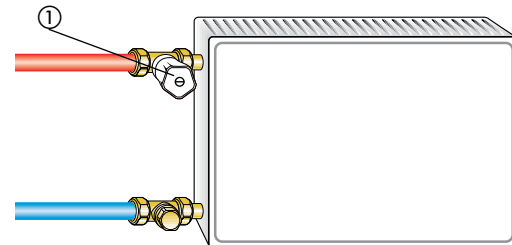

1) Teromotec

Technical data


Diagram DN 15 (1/2") to DN 20 (3/4")

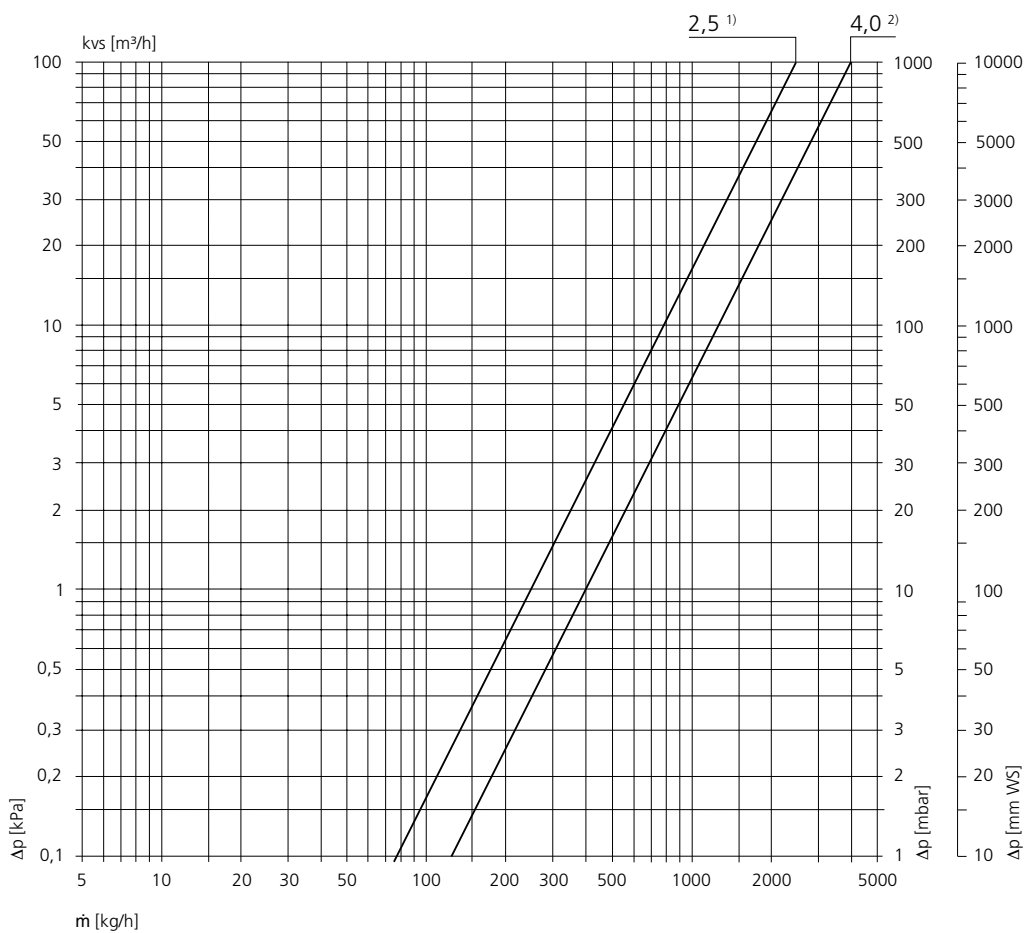

1) Straight


2) Angle

Articles



Angle


DN		Kvs	Article No
15	(1/2")	4,0	0161-02.000
20	(3/4")	4,0	0161-03.000



Straight

DN		Kvs	Article No
15	(1/2")	2,5	0162-02.000
20	(3/4")	2,5	0162-03.000

Accessories



Compression fitting

for copper or precision steel pipes.
Female thread connection Rp 3/8 – Rp 3/4.
Metal-to-metal joint. Brass nickel-plated.
Support sleeves should be used for a pipe wall thickness of 0.8 – 1 mm. Follow the specifications of the pipe manufacturer.


Ø Pipe	DN valve	EAN	Article No
12	10 (3/8")	4024052174614	2201-12.351
15	15 (1/2")	4024052175017	2201-15.351
16	15 (1/2")	4024052175116	2201-16.351
18	20 (3/4")	4024052175215	2201-18.351



Support sleeve

for copper or precision steel pipe with a 1 mm wall thickness.
Brass.

Ø Pipe	L	EAN	Article No
12	25,0	4024052127016	1300-12.170
15	26,0	4024052127917	1300-15.170
16	26,3	4024052128419	1300-16.170
18	26,8	4024052128815	1300-18.170



Thermostatic insert

Retrofitting insert for Termotec.
With a special tool (on request) the changing is possible under pressure.

DN valve	Article No
15, 20 (1/2", 3/4")	0162-03.300

Dimensions

Lengths according to DIN EN 215 Series F

Angle	Straight	$\alpha = 60^\circ (\pm 1^\circ)$														
		DN	D	b	d ₁	d ₂	l ₁	l ₂	l ₃	l ₄	l ₅	l ₆	SW ₁ / min. SW ₂	H ₁	H ₂	D ₁
		15	Rp1/2	9	G3/4	R1/2	55	82	26	53	23	7	27 / 30	44	49	36
		20	Rp3/4	10	G1	R3/4	65	98	30	63	26	8	32 / 37	44	49	36

SW = Spanner opening 1 mm = 0,0394 inch