

# Calypso



**Thermostatic Radiator Valves**  
Without presetting

# Calypso

The Calypso thermostatic valve bodies are used in two-pipe pump heating systems with normal temperature spread. The double O-ring sealing ensures a long-life and maintenance-free operation.



## Key features

- > **Double O-ring seal**  
For durable and maintenance free operation
- > **Thermostatic insert replaceable under pressure**  
with DN 10 to DN 20

## Technical description

### Applications:

Heating systems

### Function:

Control  
Shut-off

### Dimensions:

DN 10-20

### Pressure class:

PN 10

### Temperature:

Max. working temperature: 120°C, with protection cap or actuator 100°C.  
Min. working temperature: 2°C.

### Materials:

Valve body: Brass  
O-rings: EPDM rubber  
Valve disc: EPDM rubber  
Return spring: Stainless steel  
Valve insert: Brass

The complete thermostatic insert can be replaced using the fitting tool without draining the system.

Spindle: Niro-steel spindle with double O-ring sealing. The outer O-ring can be replaced under pressure.

### Surface treatment:

Valve body and fittings are nickel-plated.

### Marking:

THE, country code, flow direction arrow, DN and KEYMARK-Designation. II+ Designation.  
Black protection cap. Stuffing box with black label.

### Standards:

The thermostatic valve bodies meet the following requirements:

– KEYMARK certified and tested to DIN EN 215.

KEYMARK-certified thermostatic heads and thermostatic valve bodies see also technical leaflet "Thermostatic Heads".




### Pipe connection:

The female-threaded version is designed for connection to threaded pipe, or in conjunction with compression fittings, to copper or precision steel pipe. Not suitable for compression fitting for multi layer pipes. The male-threaded version, in conjunction with the appropriate compression fittings, permits connection to plastic pipe.

### Connection to thermostatic head and actuator:

HEIMEIER M30x1.5

## Construction

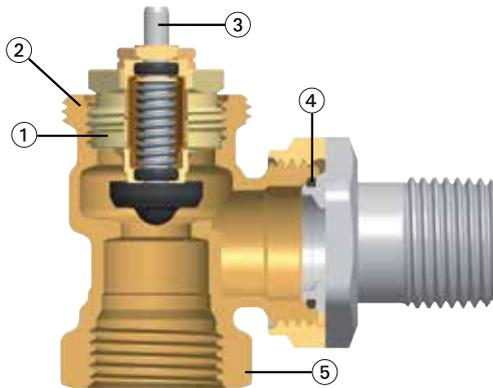

1. The insert can be replaced without draining off the system with the fitting tool
2. HEIMEIER M30x1.5 connection technology
3. Ni-ro-steel spindle with long-life double O-ring sealing
4. EPDM O-ring
5. Body made of Brass

## Application


The Calypso thermostatic valve bodies are used in pump heating systems with normal temperature spread. Corresponding to the standards EnEV and DIN V 4701-10, the valve bodies can be designed with a p-band from 1 K to 3 K thus enabling a broad flow spectrum. A hydraulic balance, which is an additional requirement, can be reached with the appropriate lockshields e. g. Regulux.

### Noise behaviour

To ensure low-noise performance, the following conditions must be met:

- On the basis of experience, the differential pressure over the thermostatic valves should not exceed about 20 kPa = 200 mbar = 0.2 bar. If in designing the system, higher transient differentials might be experienced in the part-load flow range, differential pressure control equipment such as a STAP Differential Pressure Controller or Hydrolux bypass valves can be used.
- Mass-flow must be correctly adjusted.
- The system must be completely deaerated.

### Sample application

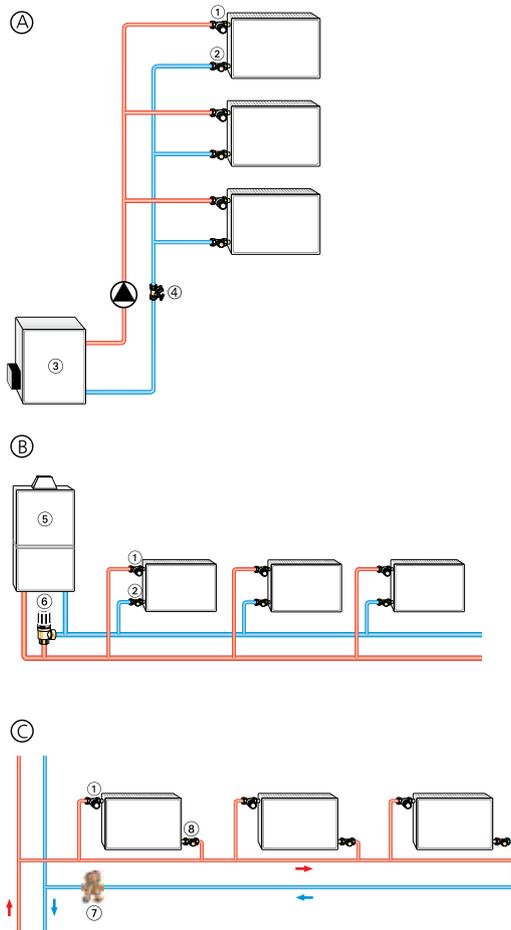

- A. Two-pipe heating system
- B. Two-pipe heating system with gas-fired wall mounted heater
- C. One-pipe heating system


1. Calypso thermostatic valve body
2. Regulux lockshield
3. Boiler
4. STAD balancing valve
5. Wall-mounted gas fired heater
6. Hydrolux Overflow valve installed between the supply and return pipes for minimum circulating water level
7. TA-COMPACT-P pressure independent balancing and control valve as flow limiter
8. Regutec lockshield

**Notes**

- To avoid damage and the formation of scale deposit in the hot-water heating system, the composition of the heat transfer medium should be in accordance with the VDI guideline 2035. For industrial and long-distance energy systems, see the applicable codes VdTÜV and 1466/AGFW FW 510. A heat transfer medium containing mineral oils, or any type of lubricant containing mineral oil can have extremely negative effects and usually lead to the disintegration of EPDM seals. When using nitrite-free frost and corrosion resistance solutions with an ethylene glycol base, pay close attention to the details outlined in the manufacturers' documentation, particularly concerning concentration and specific additives.
- Flush the system before changing thermostatic valves in heavy polluted existing systems.
- The thermostatic valve bodies can be used with all HEIMEIER thermostatic heads and HEIMEIER or TA thermal or motorized actuators. The optimal tuning of the components guarantees maximum safety. When using actuators from other manufacturers, make sure that the pressure power is appropriate for thermostatic valve bodies with soft sealing valve discs.

**Technical data**


**Diagram DN 10 (3/8") to DN 20 (3/4"), valve body with thermostatic head**

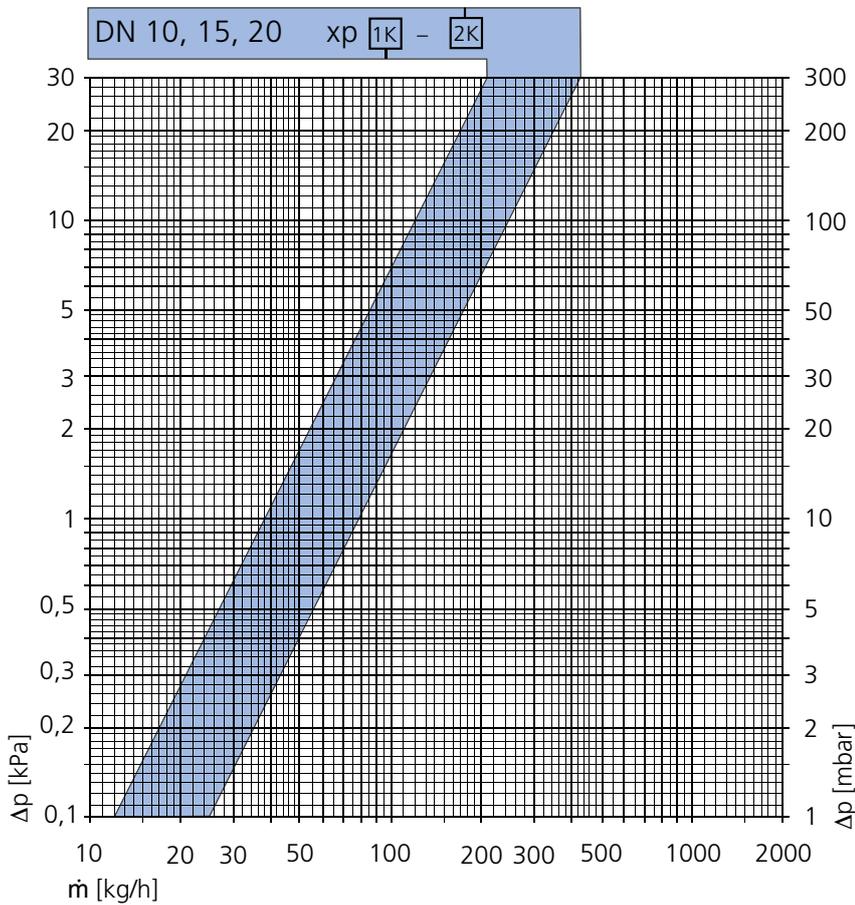

Valve body with thermostatic head	Kv P-band xp [K]			Kvs				Permitted differential pressure, during which the valve is kept closed Δp [bar]	
	1,0	1,5	2,0	Angle	Straight	Axial	Double angle	Th.-head	EMO T/TM EMOtec EMO 3 TA-Slider 160
DN 10 (3/8")	0,38	0,59	0,79	2,00	1,50	1,50	1,30	1,00	3,50
DN 15 (1/2")	0,38	0,59	0,79	2,00	2,00	1,50	1,50	1,00	3,50
DN 20 (3/4")	0,38	0,59	0,79	2,50	2,50	-	-	1,00	3,50


Kv/Kvs = m<sup>3</sup>/h at a pressure drop of 1 bar.

## Articles



### Angle


DN	D	d2	I3	I4	I5	H1	Kv [xp] 1 K / 2 K	Kvs	EAN	Article No
10	Rp3/8	R3/8	24	49	20	24	0,38 / 0,79	2,00	4024052922611	3441-01.000
15	Rp1/2	R1/2	26	53	23	23,5	0,38 / 0,79	2,00	4024052922819	3441-02.000
20	Rp3/4	R3/4	30	63	26	21,5	0,38 / 0,79	2,50	4024052927319	3441-03.000



### Angle


with male thread G 3/4

DN	d1	d2	I3	I4	H1	Kv [xp] 1 K / 2 K	Kvs	EAN	Article No
15	G3/4	R1/2	26	53	23,5	0,38 / 0,79	2,00	4024052949014	3445-02.000



### Straight


DN	D	d2	I1	I2	H2	Kv [xp] 1 K / 2 K	Kvs	EAN	Article No
10	Rp3/8	R3/8	50	76	22,5	0,38 / 0,79	1,50	4024052926619	3442-01.000
15	Rp1/2	R1/2	55	83	22,5	0,38 / 0,79	2,00	4024052926718	3442-02.000
20	Rp3/4	R3/4	65	97	22,5	0,38 / 0,79	2,50	4024052927418	3442-03.000



### Straight


with male thread G 3/4

DN	d1	d2	H2	Kv [xp] 1 K / 2 K	Kvs	EAN	Article No
15	G3/4	R1/2	22,5	0,38 / 0,79	2,00	4024052949113	3446-02.000



### Axial

DN	D	d2	I3	I4	H1	Kv [xp] 1 K / 2 K	Kvs	EAN	Article No
10	Rp3/8	R3/8	24,5	50	34,5	0,38 / 0,79	1,50	4024052178711	3440-01.000
15	Rp1/2	R1/2	26	53	34,5	0,38 / 0,79	1,50	4024052178810	3440-02.000
20	Rp3/4	R3/4	30	63	34,5	0,38 / 0,79	2,00	4024052927210	3440-03.000



### Axial

with male thread G3/4

DN	d1	d2	I3	I4	H1	Kv [xp] 1 K / 2 K	Kvs	EAN	Article No
15	G3/4	R1/2	26	53	34,5	0,38 / 0,79	1,50	4024052949212	3447-02.000

\*) SW1: DN 10 = 22 mm, DN 15 = 27 mm, DN 20 = 32 mm


SW2: DN 10 = 27 mm, DN 15 = 30 mm, DN 20 = 37 mm

Values H1 and H2 are at the bearing surface thermostatic head or actuator.

Kvs = m<sup>3</sup>/h at a pressure drop of 1 bar and fully open valve.

Kv [xp] max. 1 K / 2 K = m<sup>3</sup>/h at a pressure drop of 1 bar with thermostatic head.


## Accessories



### Fitting tool

complete with case, box spanner and replacement seals, for replacing thermostatic inserts without draining off the heating system (for DN 10 to DN 20).


	EAN	Article No
Fitting tool	4024052298914	9721-00.000



### Compression fitting

for copper or precision steel pipe according to DIN EN 1057/10305-1/2. Female thread connection Rp3/8 – Rp3/4. Metal-to-metal joint. Brass nickel-plated. Support sleeves should be used for a pipe wall thickness of 0.8 – 1 mm. Follow the specifications of the pipe manufacturer.


Ø Pipe	DN	EAN	Article No
12	10 (3/8")	4024052174614	2201-12.351
14	15 (1/2")	4024052174713	2201-14.351
15	15 (1/2")	4024052175017	2201-15.351
16	15 (1/2")	4024052175116	2201-16.351
18	20 (3/4")	4024052175215	2201-18.351



### Support sleeve

for copper or precision steel pipe with a 1 mm wall thickness. Brass.

Ø Pipe	L	EAN	Article No
12	25,0	4024052127016	1300-12.170
15	26,0	4024052127917	1300-15.170
16	26,3	4024052128419	1300-16.170
18	26,8	4024052128815	1300-18.170



### Compression fitting

for copper or precision steel pipe according to DIN EN 1057/10305-1/2. Connection male thread G3/4 according to DIN EN 16313 (Eurocone). Metal-to-metal joint. Brass nickel-plated. With a pipe wall thickness of 0.8-1 mm insert supporting sleeves. Heed pipe manufacturer's technical advice.


Ø Pipe	EAN	Article No
12	4024052214211	3831-12.351
14	4024052214310	3831-14.351
15	4024052214617	3831-15.351
16	4024052214914	3831-16.351
18	4024052215218	3831-18.351



### Compression fitting

for copper or precision steel pipe according to DIN EN 1057/10305-1/2. Connection male thread G3/4 according to DIN EN 16313 (Eurocone). Soft sealed, max. 95°C. Nickel-plated brass.

Ø Pipe	EAN	Article No
15	4024052515851	1313-15.351
18	4024052516056	1313-18.351



### Compression fitting

for plastic pipe according to DIN 4726, ISO 10508.  
PE-X: DIN 16892/16893, EN ISO 15875;  
PB: DIN 16968/16969.  
Connection male thread G3/4 according to DIN EN 16313 (Eurocone). Nickel plated brass.

Ø Pipe	EAN	Article No
12x1,1	4024052136018	1315-12.351
14x2	4024052134618	1311-14.351
16x1,5	4024052136117	1315-16.351
16x2	4024052134816	1311-16.351
17x2	4024052134915	1311-17.351
18x2	4024052135110	1311-18.351
20x2	4024052135318	1311-20.351



### Compression fitting

for Alu/PEX multi-layer pipe according to DIN 16836.  
Connection male thread G3/4 according to DIN EN 16313 (Eurocone). Nickel-plated brass.

Ø Pipe	EAN	Article No
16x2	4024052137312	1331-16.351
18x2	4024052137411	1331-18.351

Other accessories, see catalogue leaflet "Accessories and spare parts for thermostatic radiator valves".