


SAV

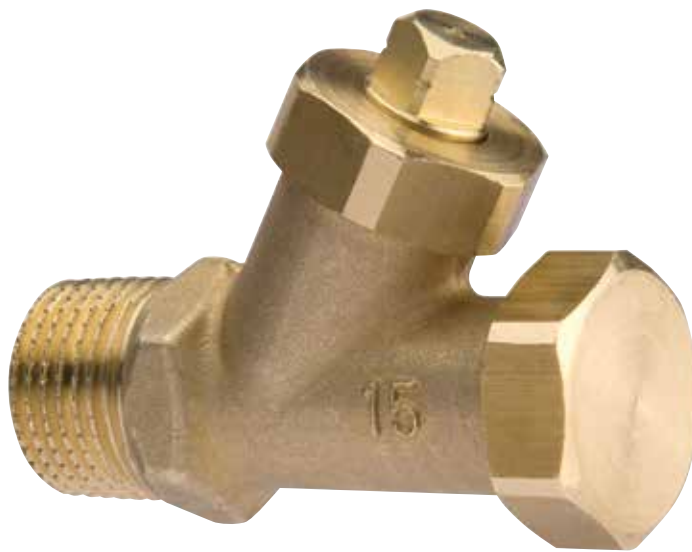

Draining units

Drain cock

SAV

Drain cock with hose connection.

Key features

> Drain

Drain with hose connection for easy maintenance.

> AMETAL®

Dezincification resistant alloy that guarantees a longer valve lifetime, and lowers the risk of leakage.



Technical description

Application:

Heating and cooling systems
Tapwater systems

Dimensions:

DN 15

Material:

All parts affected by water: AMETAL®
Cap: Brass
O-ring: EPDM-rubber

Function:

Draining

Pressure class:


PN 16

Temperature:

Max working temperature: 120°C

AMETAL® is the dezincification resistant alloy of IMI Hydronic Engineering.

Articles

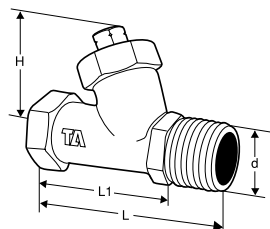

SAV

DN	H	L	L1	d	EAN	Article No
15	35	61	47	R1/2	7318793528506	75 717-015

The products, texts, photographs, graphics and diagrams in this document may be subject to alteration by IMI Hydronic Engineering without prior notice or reasons being given. For the most up to date information about our products and specifications, please visit www.imi-hydronic.com.