


**Climate
Control**

IMI TA

SAV

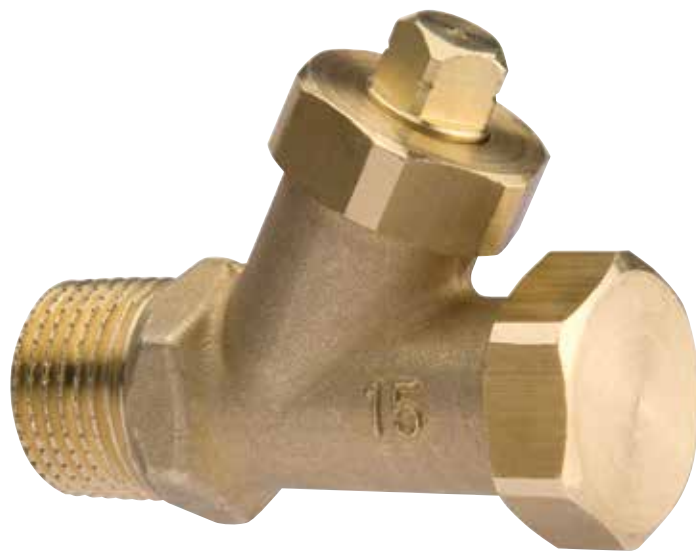

Draining units
Drain cock

SAV

Drain cock with hose connection.

Key features

Drain

Drain with hose connection for easy maintenance.

AMETAL®

Dezincification resistant alloy that guarantees a longer valve lifetime, and lowers the risk of leakage.



Technical description

Application:

Heating and cooling systems
Tapwater systems

Dimensions:

DN 15

Material:

All parts affected by water: AMETAL®
Cap: Brass
O-ring: EPDM-rubber

Function:

Draining

Pressure class:


PN 16

Temperature:

Max working temperature: 120°C

AMETAL® is the dezincification resistant alloy of IMI.

Articles

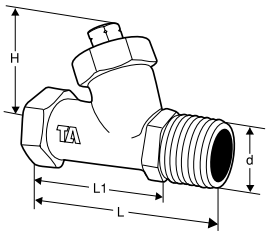

SAV

DN	H	L	L1	d	EAN	Article No
15	35	61	47	R1/2	7318793528506	75 717-015