


STAF-SG –

ANSI flanges

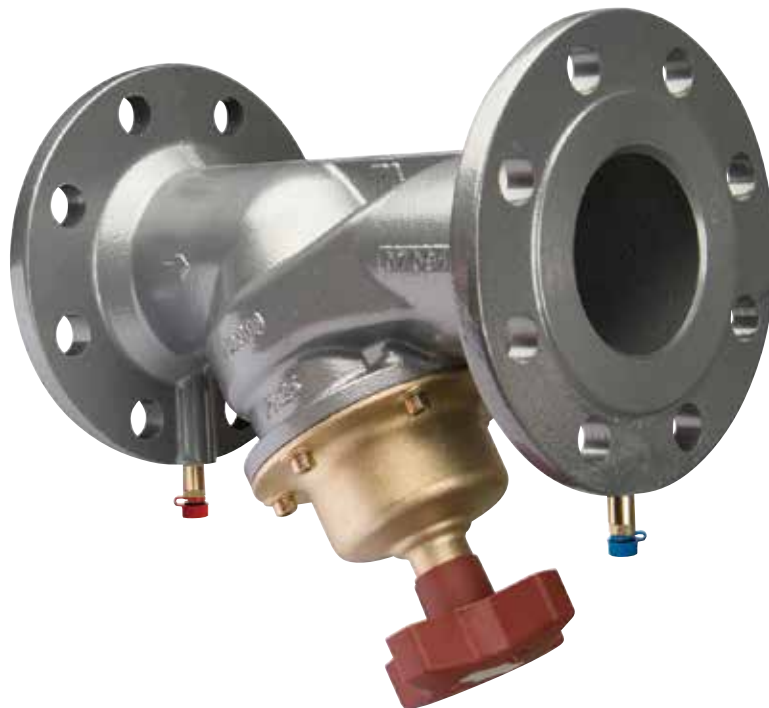

Balancing valves
DN 20-400

STAF-SG – ANSI flanges

A flanged, ductile iron balancing valve that delivers accurate hydronic performance in an impressive range of applications. The STAF-SG is ideal for use mainly on the secondary side in heating and cooling systems.

Key features

- > **Handwheel**
Equipped with a digital read-out, the handwheel ensures accurate and straightforward balancing.
- > **Self-sealing measuring points**
For simple, accurate balancing.
- > **Positive shut-off function**
For easy maintenance.



Technical description

Application:

Heating (not steam) and cooling systems

Functions:

Balancing
Pre-setting
Measuring
Shut-off (The restriction cone for valve sizes DN 65-400 is pressure released).

Dimensions:

DN 20-400

Pressure class:

Class 150

Temperature:

Max. working temperature: 120°C
Min. working temperature: -10°C

Media:

Water or neutral fluids, water-glycol mixtures (0-57%).

Material:

Body: Ductile iron, EN-GJS-400-15
(~ ASTM A536 Grade 60-40-18.
ISO 1083 Grade 400-15).

DN 20-150:
Bonnet, cone and spindle of AMETAL®.
DN 200-300:
Bonnet and cone of ductile iron
EN-GJS-400-15, and spindle of AMETAL®.
DN 350-400:
Bonnet of ductile iron EN-GJS-400-15,
cone of silicon brass CuZn16Si4-C
(EN 1982) and gunmetal CuSn5Zn5Pb5
(EN 1982), and spindle of AMETAL®.

Cone DN 65-400: PTFE coated.

Seals: EPDM.
Slip washer: PTFE.
Bonnet bolts: Surface treated steel.
Measuring points: AMETAL® and EPDM.
Handwheel: DN 20-50 polyamide and
TPE, DN 65-150 polyamide, DN 200-400
aluminium.

AMETAL® is the dezincification resistant alloy of IMI Hydronic Engineering.

Surface treatment:

DN 20-200: Epoxy painting.
DN 250-400: Duasolid painting.

Marking:

DN 20-50: TA, PN, DN (mm), 400-15
(material) and flow direction arrow.
DN 65-400: TA, Class 150, size (inch),
60-40-18 (material), casting date and flow
direction arrow.
CE-marking:
CE: STAF-SG (Class 150) DN 65-150.
CE 0409*: STAF-SG (Class 150)
DN 200-300.
*) Notified body.

Flanges:

DN 20-50: ISO 7005-2 and EN 1092-2.
Bolt circle according to Class 150
ASME/ANSI B16.42.
DN 65-400: Class 150 ASME/ANSI
B16.42 (~ PN 20 according to
ISO 7005-2).

Face to face:

According to ISO 5752 series 1 and
EN 558-1 series 1.

Measuring points

Measuring points are self-sealed. Remove the cap and insert the probe through the seal.

Sizing

When Δp and the design flow are known, use the formula to calculate the Kv value or use the diagram.

$$Kv = 0,01 \frac{q}{\sqrt{\Delta p}} \quad q \text{ l/h, } \Delta p \text{ kPa}$$

$$Kv = 36 \frac{q}{\sqrt{\Delta p}} \quad q \text{ l/s, } \Delta p \text{ kPa}$$


Measuring accuracy

The handwheel zero position is calibrated and must not be changed.

Deviation of flow at different settings


The curve holds for valves with the correct flow direction, straight pipe distances (Fig. 1) and normal pipe fittings.

DN 20-50

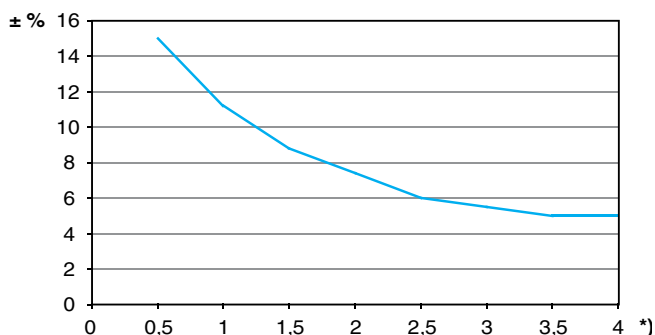


*) Setting, No. of turns.

DN 65-400

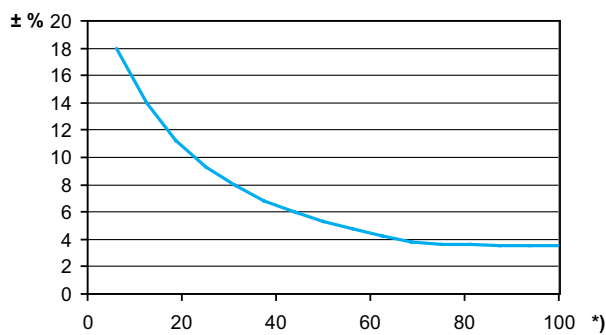

*) Setting (%) of fully open valve.

Fig. 1

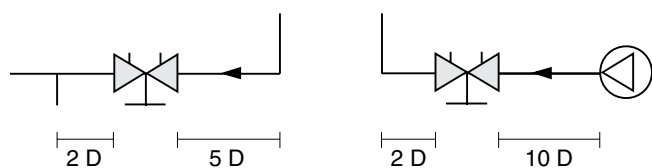

D = Valve DN

Correction factors

The flow calculations are valid for water (+20°C). For other liquids with approximately the same viscosity as water (≤ 20 cSt = $3^\circ\text{E}=100\text{S.U.}$), it is only necessary to compensate for the specific density. However, at low temperatures, the viscosity increases and laminar flow may occur in the valves. This causes

a flow deviation that increases with small valves, low settings and low differential pressures. Correction for this deviation can be made with the software HySelect or directly in our balancing instruments.

Kv values**DN 20-50**

Turns	DN 20	DN 25	DN 32	DN 40	DN 50
0.5	0,511	0,60	1,14	1,75	2,56
1	0,757	1,03	1,90	3,30	4,2
1.5	1,19	2,10	3,10	4,60	7,2
2	1,90	3,62	4,66	6,10	11,7
2.5	2,80	5,30	7,10	8,80	16,2
3	3,87	6,90	9,50	12,6	21,5
3.5	4,75	8,00	11,8	16,0	26,5
4	5,70	8,70	14,2	19,2	33

DN 65-150

Turns	DN 65-2	DN 80	DN 100	DN 125	DN 150
0.5	1,8	2	2,5	5,5	6,5
1	3,4	4	6	10,5	12
1.5	4,9	6	9	15,5	22
2	6,5	8	11,5	21,5	40
2.5	9,3	11	16	27	65
3	16,3	14	26	36	100
3.5	25,6	19,5	44	55	135
4	35,3	29	63	83	169
4.5	44,5	41	80	114	207
5	52	55	98	141	242
5.5	60,5	68	115	167	279
6	68	80	132	197	312
6.5	73	92	145	220	340
7	77	103	159	249	367
7.5	80,5	113	175	276	391
8	85	120	190	300	420

DN 200-400

Turns	DN 200	DN 250	DN 300	DN 350	DN 400
0.5	-	-	-	-	-
1	-	-	-	-	-
1.5	-	-	-	-	-
2	40	90	-	-	-
2.5	50	110	-	-	-
3	65	140	150	109	125
3.5	90	195	230	129	148
4	120	255	300	148	171
4.5	165	320	370	170	208
5	225	385	450	207	264
5.5	285	445	535	254	326
6	340	500	620	302	386
6.5	400	545	690	352	449
7	435	590	750	404	515
7.5	470	660	815	471	590
8	515	725	890	556	680
9	595	820	970	784	894
10	650	940	1040	957	1140
11	710	1050	1120	1100	1250
12	765	1185	1200	1260	1400
13	-	-	1320	1420	1560
14	-	-	1370	1610	1730
15	-	-	1400	1760	1940
16	-	-	1450	1870	2140
17	-	-	-	1960	2280
18	-	-	-	2040	2410
19	-	-	-	2130	2530
20	-	-	-	2200	2630
21	-	-	-	-	2710
22	-	-	-	-	2780


Setting

It is possible to read the set value on the handwheel.
The number of turns between the fully open and closed positions is:

- 4 turns for DN 20-50,
- 8 turns for DN 65-150,
- 12 turns for DN 200-250,
- 16 turns for DN 300,
- 20 turns for DN 350 and
- 22 turns for DN 400.


Example DN 65

Fig. 1 Valve closed

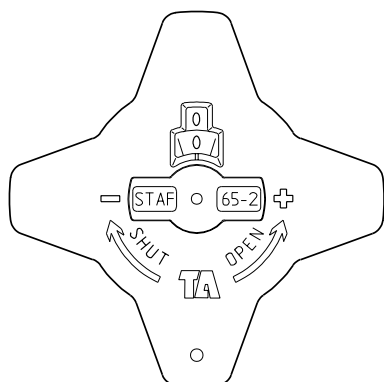

Example DN 200

Fig. 1 Valve closed

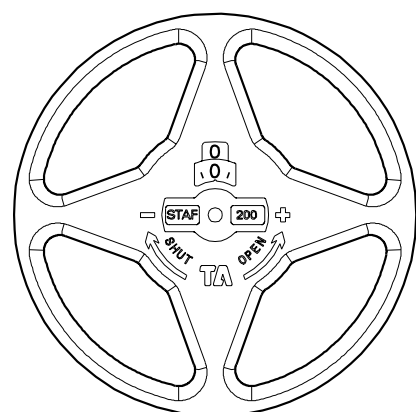

Initial setting of a valve for a particular pressure drop, e.g. corresponding to 2.3 turns on the graph, is carried out as follows:

1. Close the valve fully (Fig. 1)
2. Open the valve to 2.3 turns (Fig. 2).
3. Using an Allen key, turn the inner spindle clockwise until the stop position.
4. The valve is now set.

To check the setting of a valve, first close the valve, then open it to the stop position; the indicator then shows the presetting number, in this case 2.3 (Fig. 2).

Fig. 2 The valve is set at 2.3

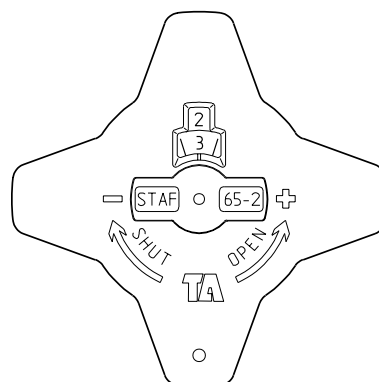


Fig. 2 The valve is set at 2.3

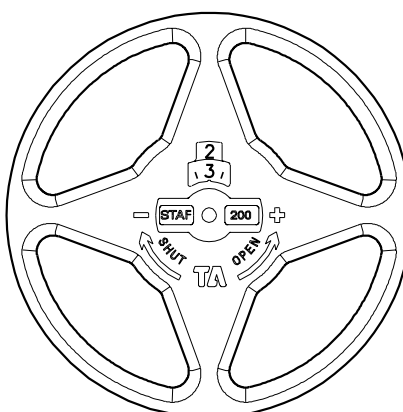


Diagram example

Wanted:

Presetting for DN 25 at a desired flow rate of 1.8 m³/h and a pressure drop of 20 kPa.

Solution:

Draw a straight line joining 1.8 m³/h and 20 kPa. This gives Kv=4.


Now draw a horizontal line from Kv=4.

This intersects the bar for DN 25 at the desired presetting of 2.1 turns.

NOTE:


If the flow rate falls outside the scale in the diagram, the reading can be made as follows: Starting with the example above, we get 20 kPa, Kv = 4 and flowrate 1.8 m³/h. At 20 kPa and Kv = 0.4 we get the flow-rate 0.18 m³/h, and at Kv = 40, we get 18 m³/h. That is, for a given pressure drop, it is possible to read 10 times or 0.1 times the flow and Kv-values.

Diagram DN 20-50

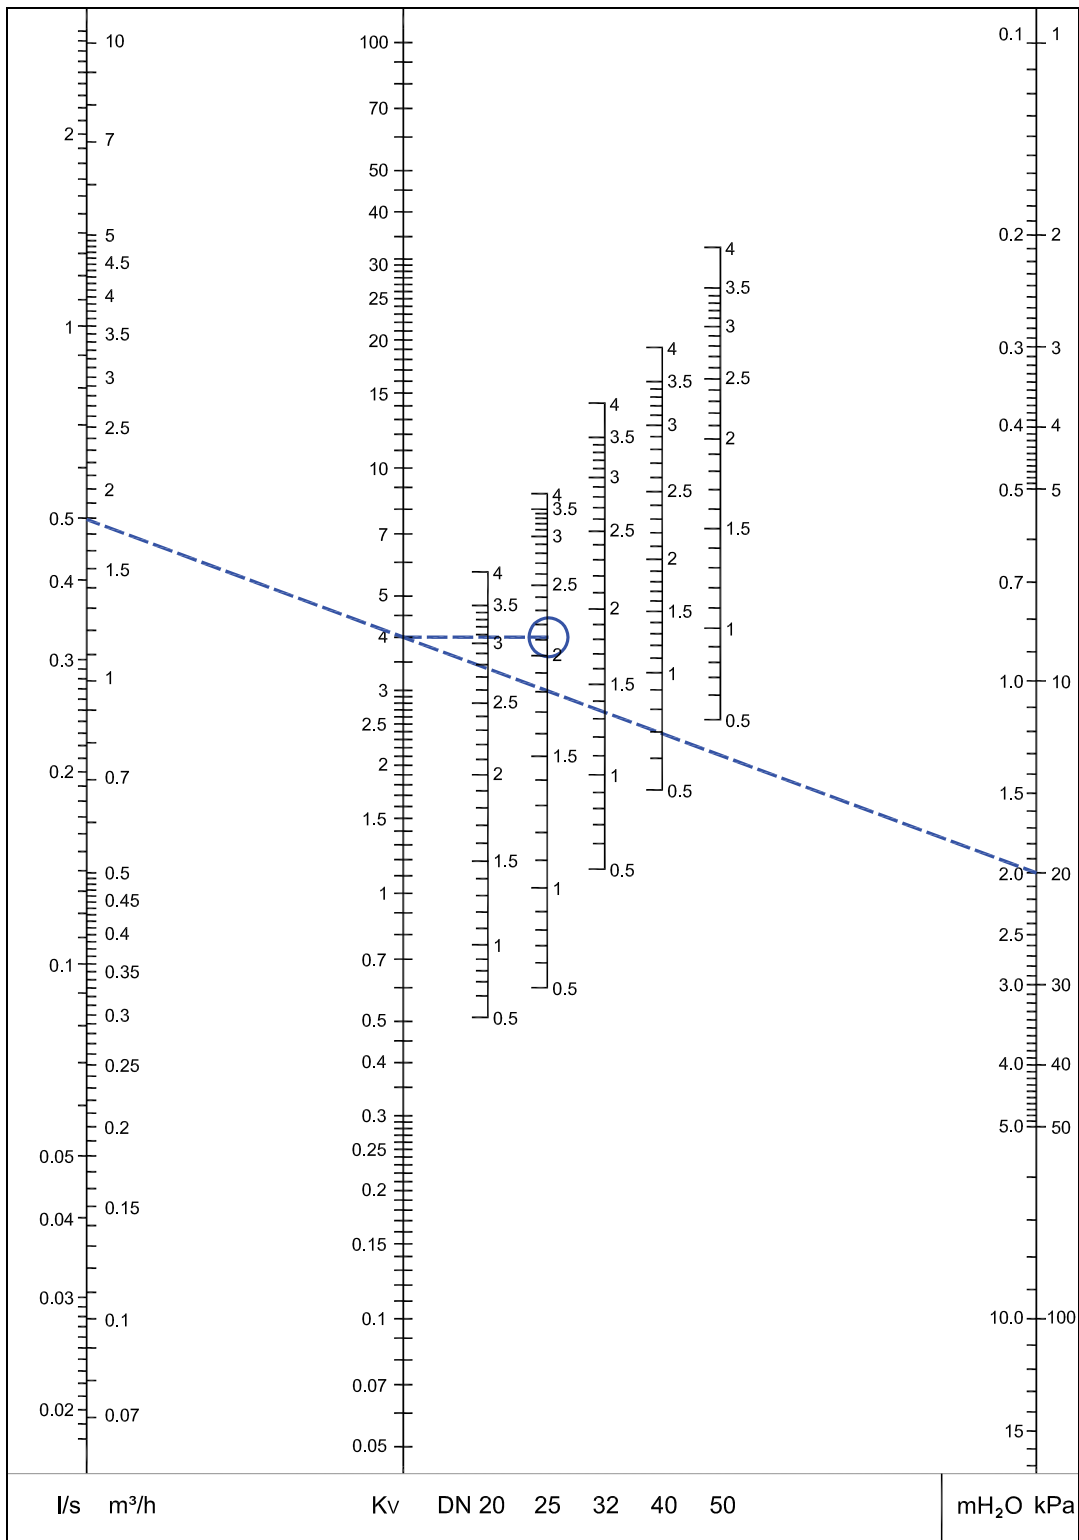


Recommended area: See Fig. 3 under "Measuring accuracy".

Diagram DN 65-150

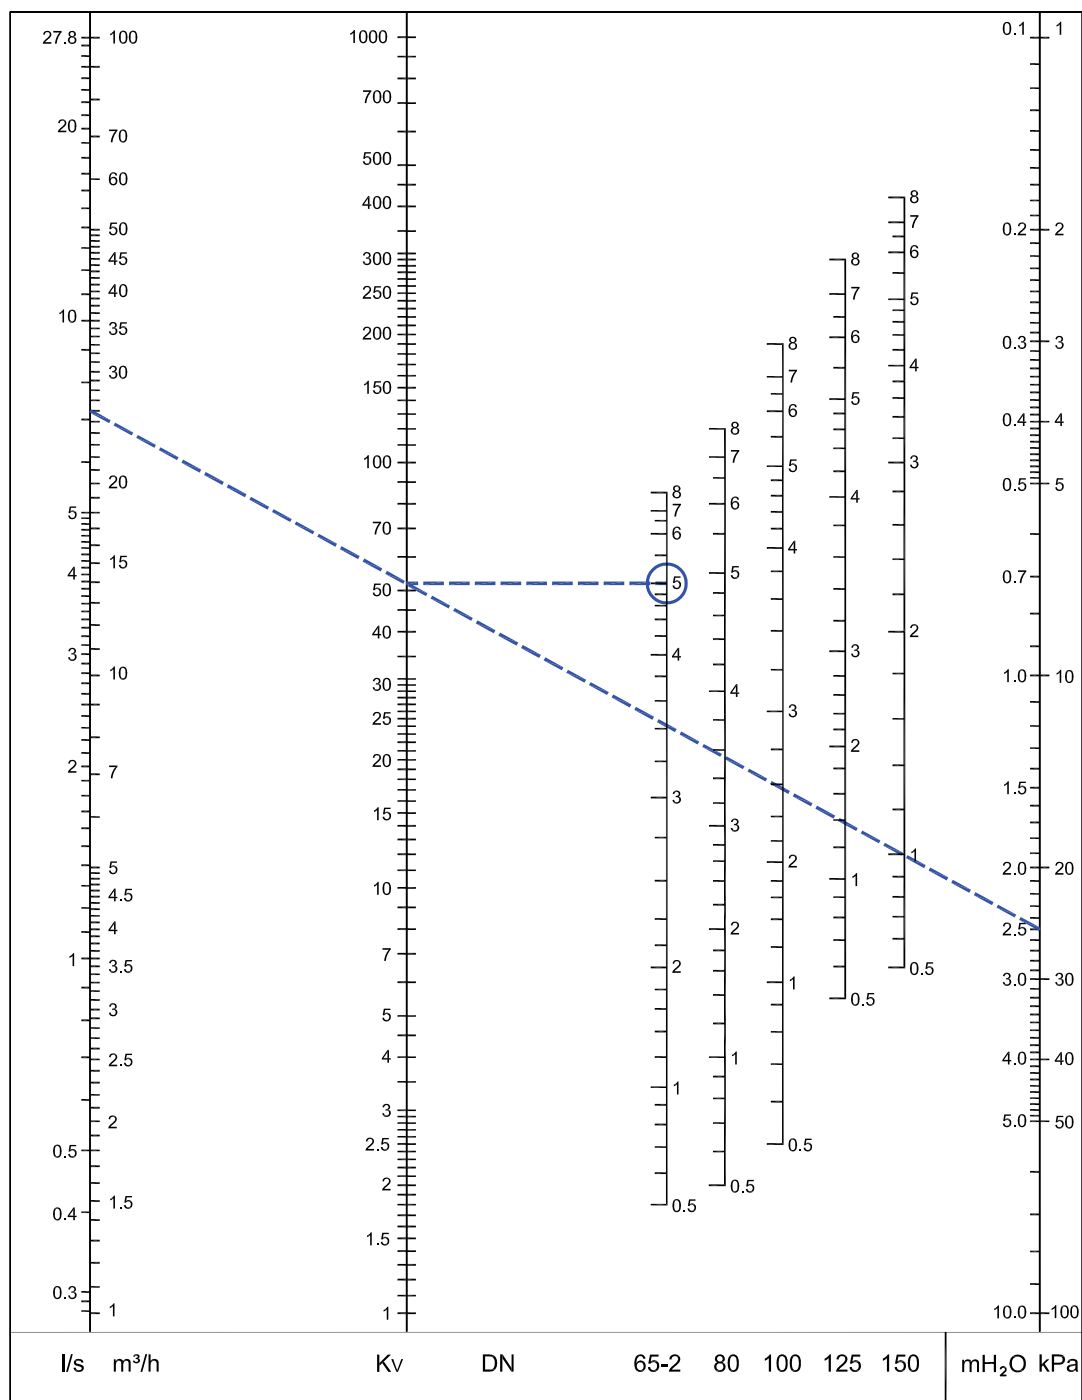


Recommended area: See Fig. 3 under "Measuring accuracy".

Diagram DN 200-400

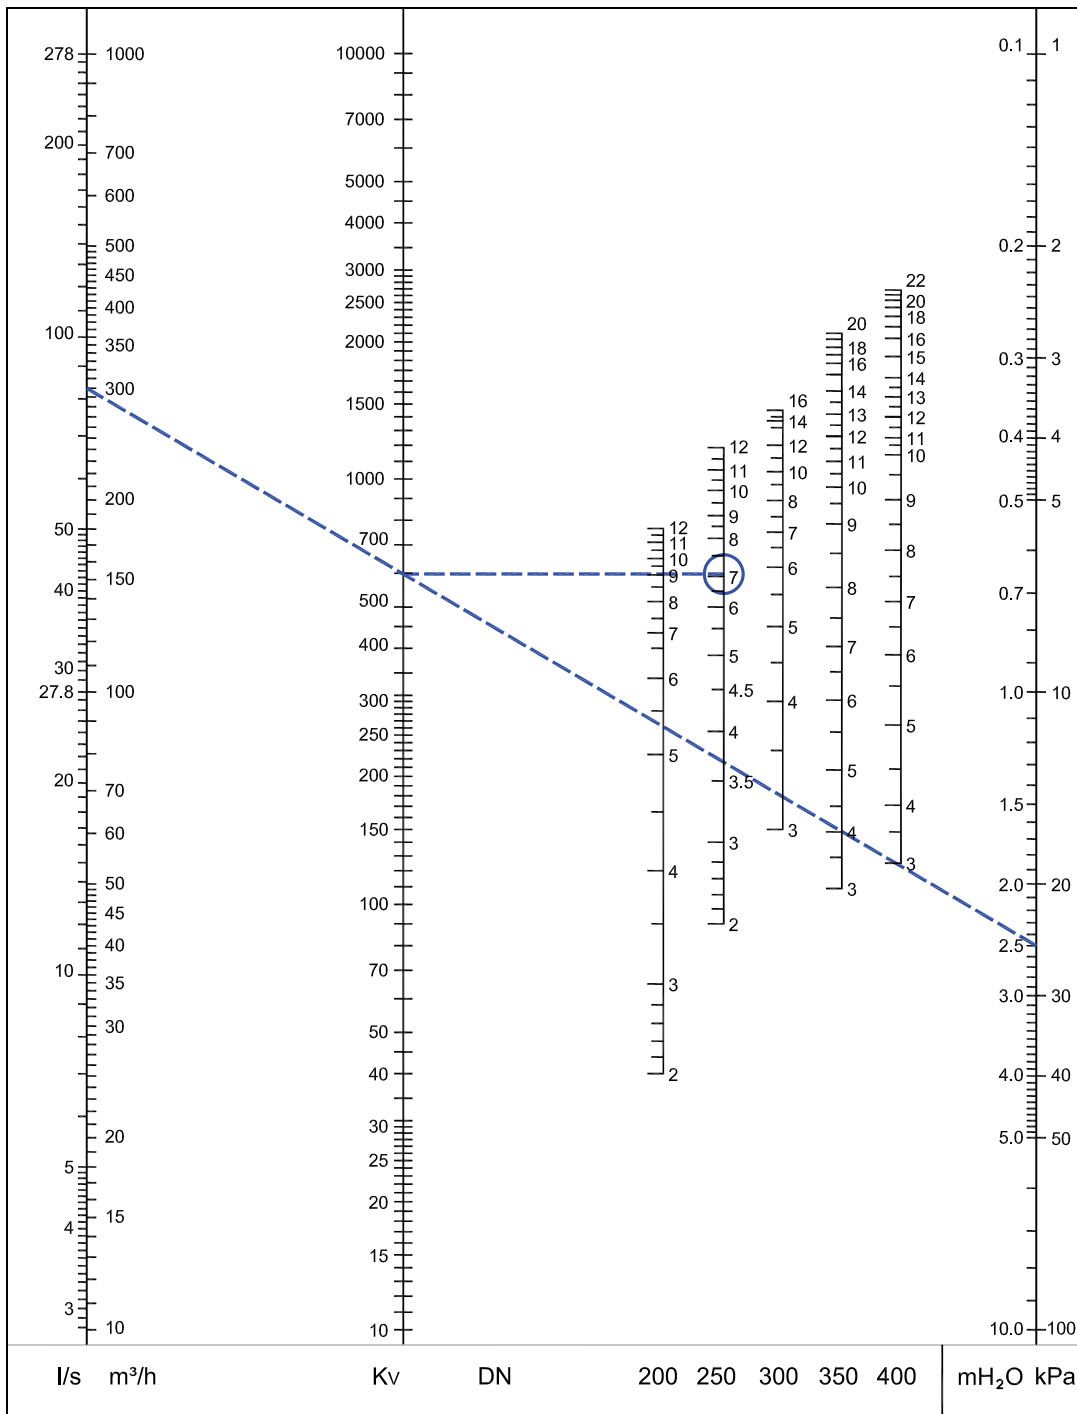


Recommended area: See Fig. 3 under "Measuring accuracy".


Articles

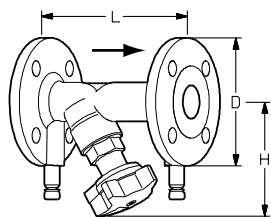
Threaded bonnet

DN	(Size)	Number of bolt holes	L	H	D	Kvs	Kg	EAN	Article No
20	3/4"	4	150	100	105	5.7	2.3	7318792830600	52 182-920
25	1"	4	160	109	115	8.7	2.9	7318792830709	52 182-925
32	1 1/4"	4	180	111	140	14.2	4.3	7318792830808	52 182-932
40	1 1/2"	4	200	122	150	19.2	5.2	7318792830907	52 182-940
50	2"	4	230	122	165	33	6.6	7318792831003	52 182-950

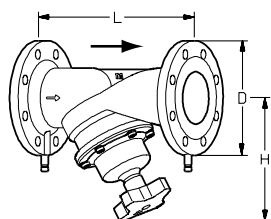
Bolted bonnet

DN	(Size)	Number of bolt holes	L	H	D	Kvs	Kg	EAN	Article No
65	2 1/2"	4	290	205	180	85	11	7318792831102	52 182-965
80	3"	4	310	220	190	120	14	7318792831201	52 182-980
100	4"	8	350	240	230	190	19.6	7318792831300	52 182-990
125	5"	8	400	275	255	300	28.1	7318792831409	52 182-991
150	6"	8	480	285	280	420	37.1	7318792831508	52 182-992

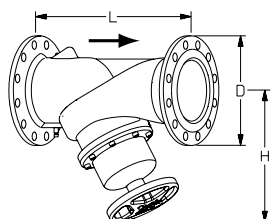
Bolted bonnet

Measurement points on body


DN	(Size)	Number of bolt holes	L	H	D	Kvs	Kg	EAN	Article No
200	8"	8	600	430	345	765	76	7318792831607	52 182-993
250	10"	12	730	420	406	1185	122	7318792831706	52 182-994
300	12"	12	850	480	483	1450	163	7318792831805	52 182-995
Not CE marked products *									
350	14"	12	980	585	533	2200	297	7318793956903	52 182-996
400	16"	16	1100	640	597	2780	406	7318793957009	52 182-997

 *) **NOTE:** Not allowed to be installed in EU or EFTA countries.

→ = Flow direction


 Kvs = m³/h at a pressure drop of 1 bar and fully open valve.

Accessories




Measuring point AMETAL®/EPDM

d	L	EAN	Article No
DN 20 - 50			
R1/4	39	7318792813108	52 179-009
R1/4	103	7318792814600	52 179-609
DN 65 - 400			
R3/8	45	7318792813009	52 179-008
R3/8	101	7318792814501	52 179-608




Measuring point Extensions 60 mm (not for 52 179-000/ -601). Can be installed without draining of the system. AMETAL®/Stainless steel/EPDM

EAN	Article No
7318792812804	52 179-006



Handwheel Complete

DN	EAN	Article No
20 - 50	7318794043503	52 186-007
65 - 150	7318792834806	52 186-002
200 - 400	7318792835001	52 186-004




Identification tag

EAN	Article No
7318792779206	52 161-990



Allen key For locking of setting.

[mm]	For DN	EAN	Article No
3	20 - 150	7318792836008	52 187-103
5	200 - 400	7318792836107	52 187-105



Insulation For heating/cooling CFC-free polyurethane. Covered with grey PVC. See catalogue leaflet "Prefab insulations" for complete details.

For DN	L	D	C	EAN	Article No
50	390	250	252	7318792840708	52 189-850
65	450	270	272	7318792840807	52 189-865
80	480	290	292	7318792840906	52 189-880
100	520	320	322	7318792841002	52 189-890
125	570	350	352	7318792841101	52 189-891
150	660	380	382	7318792841200	52 189-892

