




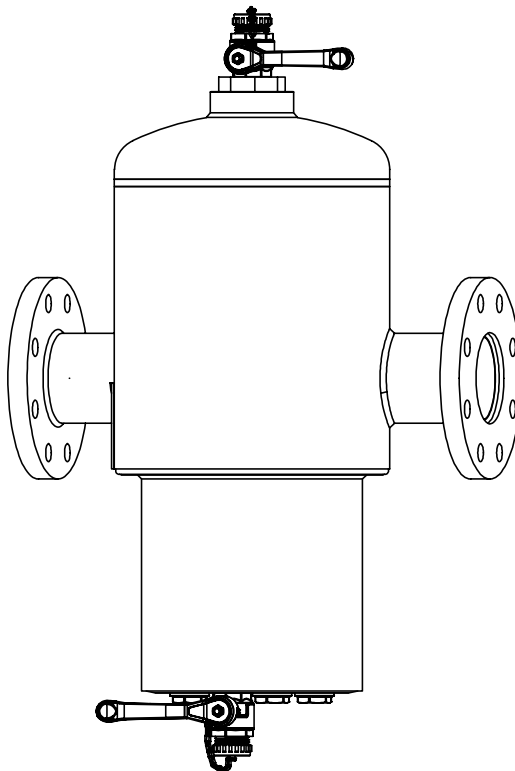
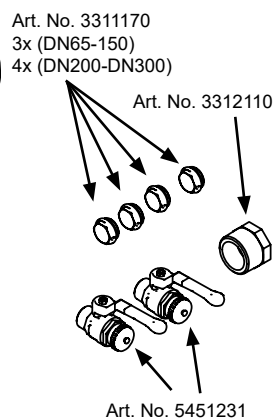
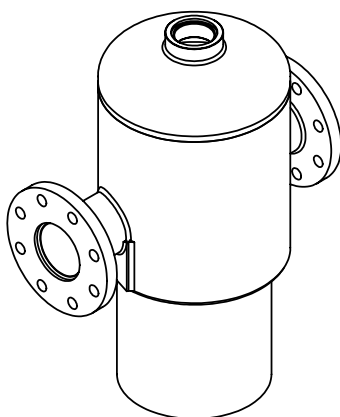




Zeparo G-Force PN25 Install

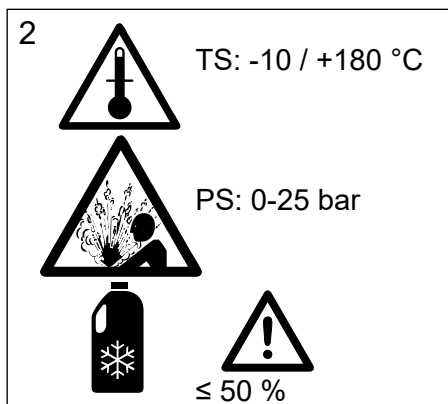

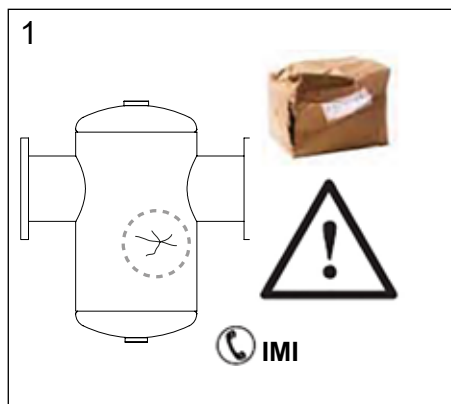




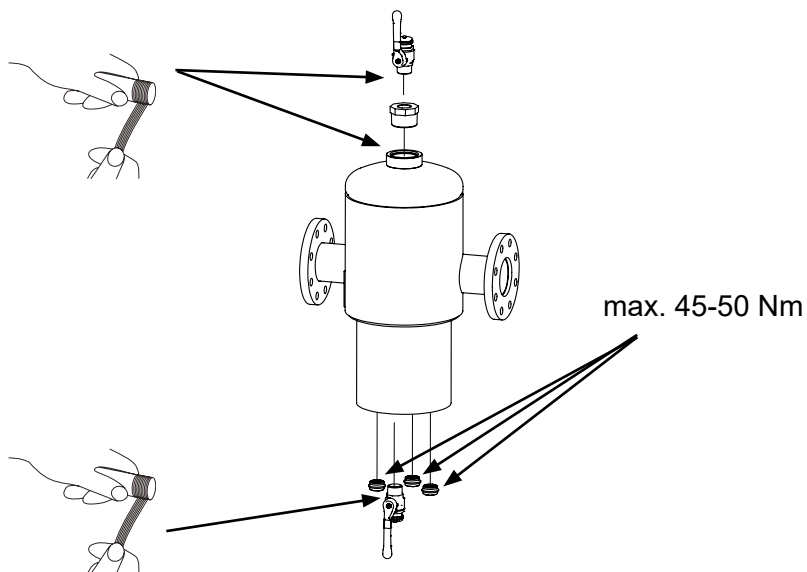




ZGM



TS: -10 / +110 °C

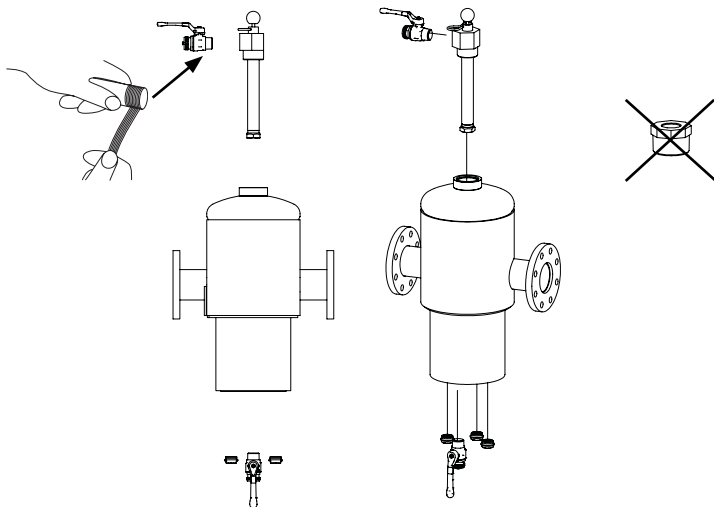

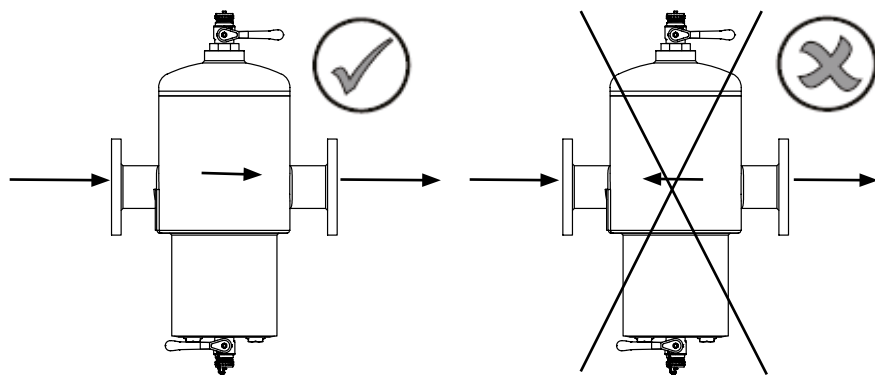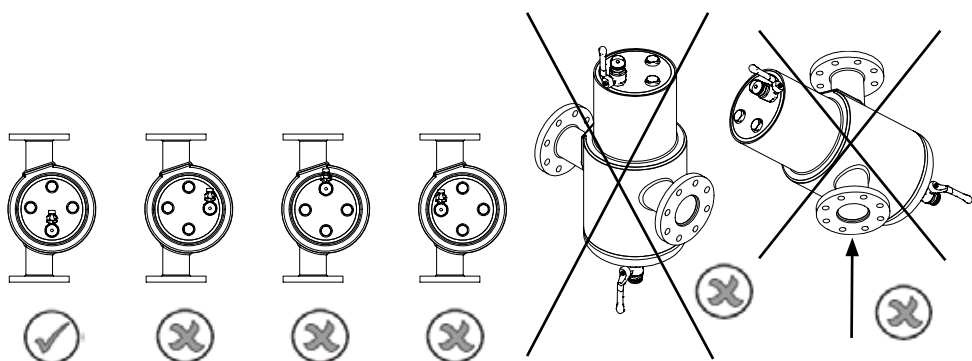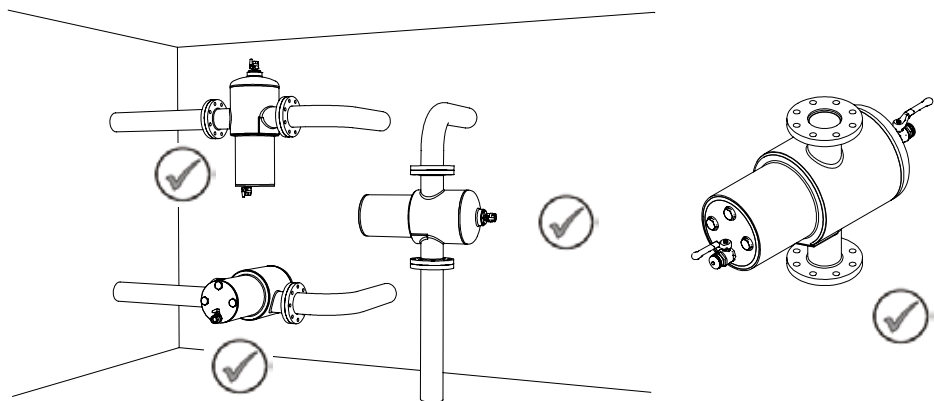


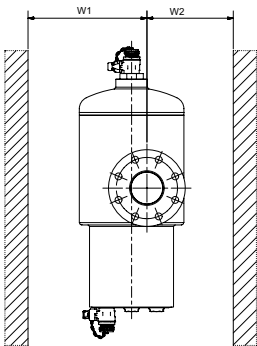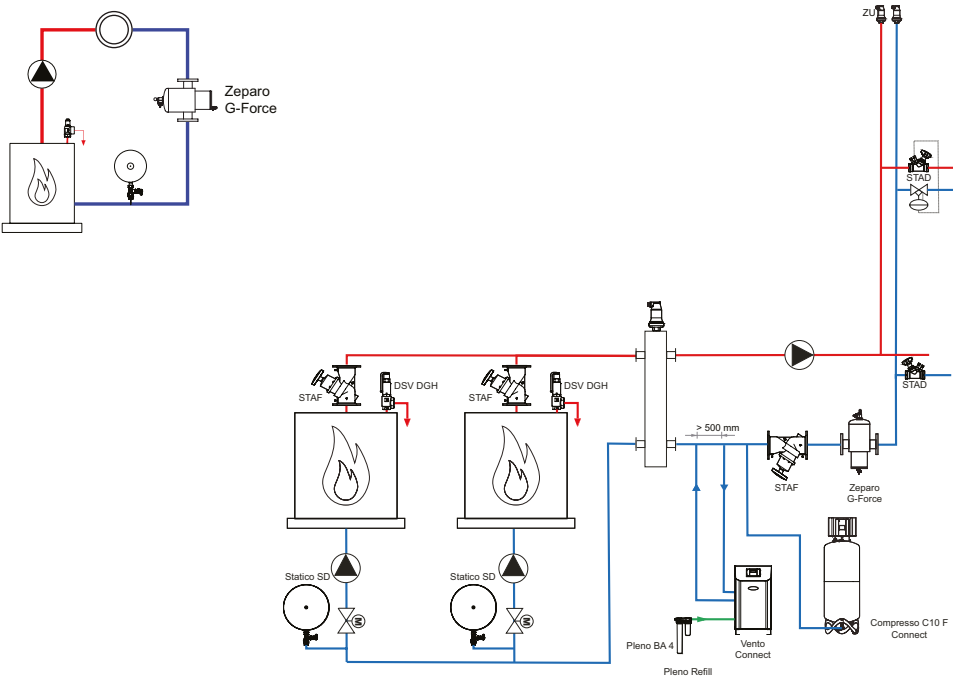



Wall distance (all versions)

Type	W1	W2	with insulation	
			Wi1	Wi2
ZG 65	150	100	200	140
ZG 80	185	105	235	170
ZG 100	185	115	235	170
ZG 125	275	150	335	210
ZG 150	275	150	335	210
ZG 200	405	225	470	290
ZG 250	515	315	580	380
ZG 300	515	315	580	380

Flanged




Type	S	H	H1	H2	h1	h2	L	q _{nom}	q _{max}	m	EAN	Article No
	[DN]							[m³/h]	[m³/h]	[kg]		
ZG 65	65	815	435	410	700	660	350	10	40	24.5	7640161632400	303041-31000
ZG 80	80	900	460	470	725	720	470	18	56	43	7640161632417	303041-31100
ZG 100	100	960	460	230	725	780	475	37	95	46	76401616326424	303041-31200
ZG 125	125	1180	575	635	950	885	635	68	148	130	7640161632431	303041-31300
ZG 150	150	1250	575	705	950	955	635	100	216	142	7640161632448	303041-31400
ZG 200	200	1470	595	905	1080	1155	900	200	375	355	7640161632455	303041-31500
ZG 250	250	1705	640	1065	1125	1315	1100	345	575	640	7640161632462	303041-31600
ZG 300	300	1855	665	1190	1150	1440	1100	540	815	715	7640161632479	303041-31700

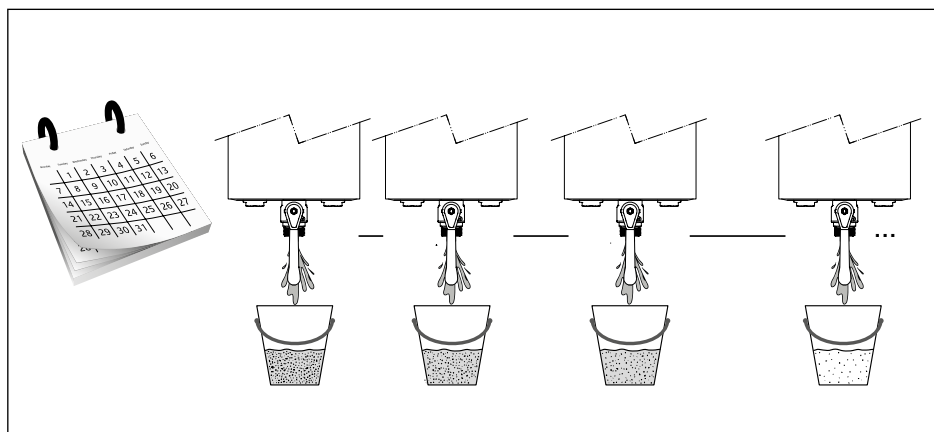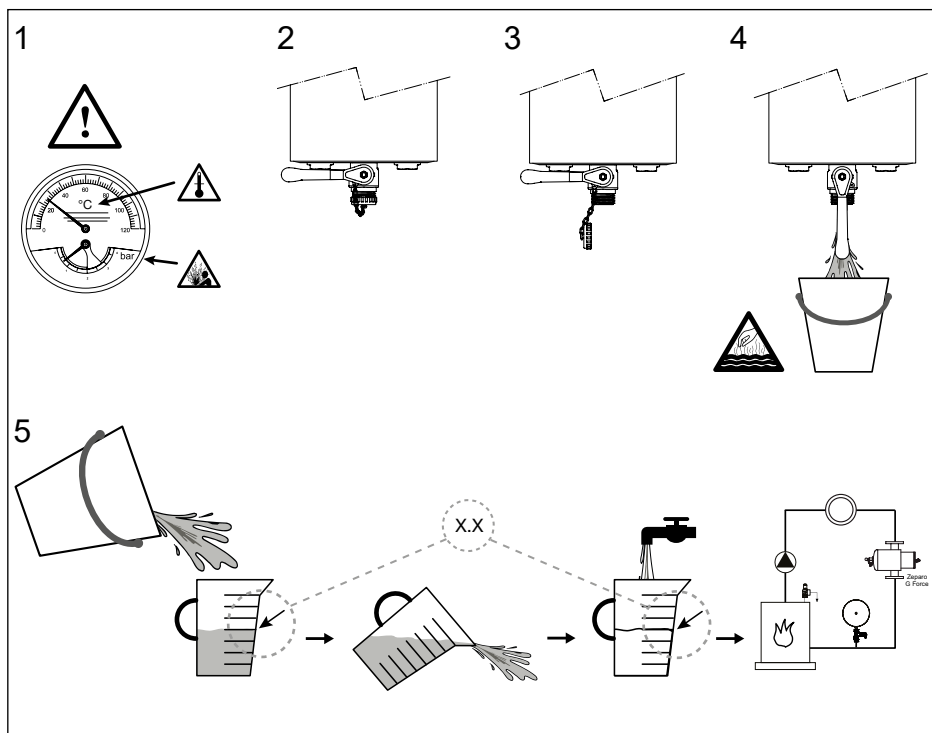


ZGM




1

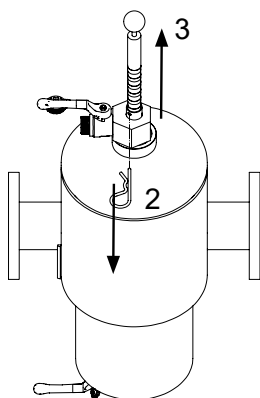

4



5



We reserve the right to introduce technical alterations without prior notice.



climatecontrol.imiplc.com