

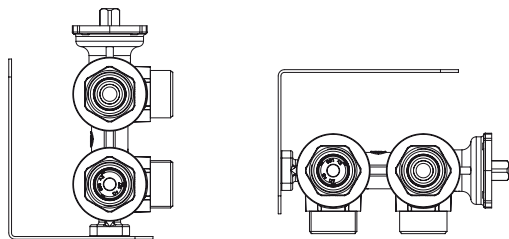


Optional accessory

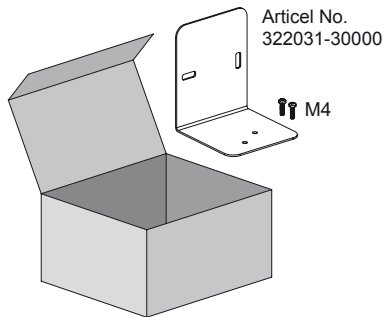

*We reserve the right to introduce technical alterations
without prior notice.*

TA-6-way valve

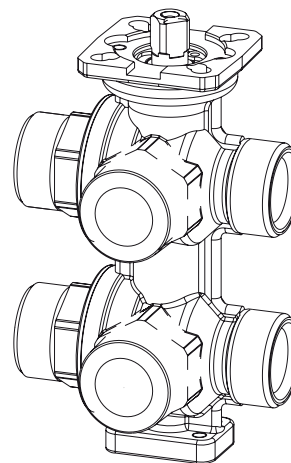


DN 15 - 20 (size 1/2" - 3/4")

PN 16 (230 psi)


Max. ΔpV : 200 kPa (29 psi)

-10°C – +120°C (+14°F – +248°F)


Kvs 1.25 DN 15
(Cvs 1.45 size 1/2")




Kvs 2.8 DN 20
(Cvs 3.24 size 3/4")




Eurocone



Flat faced ends



Kvs 4.0 DN 20
(Cvs 4.62 size 3/4")



(TA-M106/TA-MC106Y)

F03/F04
(EN ISO 5211)

