




TA Fast-Fit with internal NPT threads

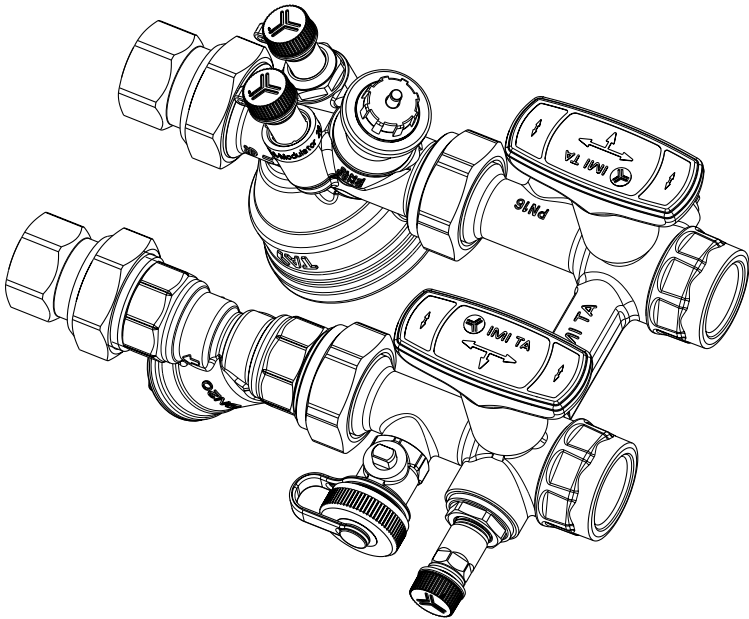





www.imi-hydraulic.com

TA-Modulator/TA-COMPACT-P



NOTE! Assembly example, product components may vary.

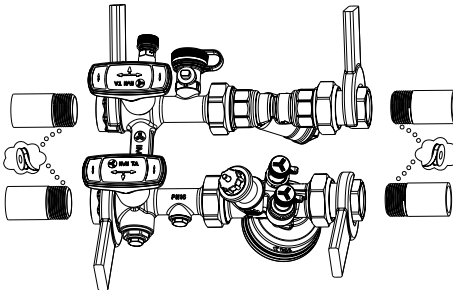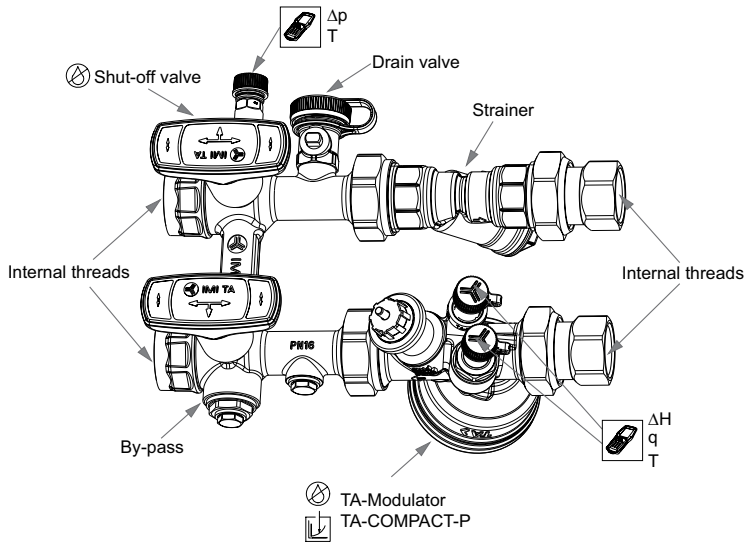


NOTE!


It is not allowed to hold the TA Fast-Fit assembly, during installation, on other places then indicated by the wrenches in the illustration.

Max. torque \leq 36.9 lbf.ft. (50 Nm)



EMO T / EMO TM




TA-Slider 160

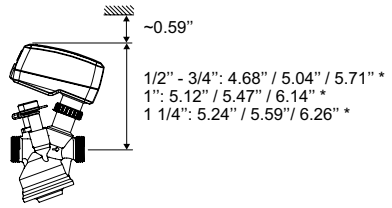

*) Height depending on actuator version.




Normal operation

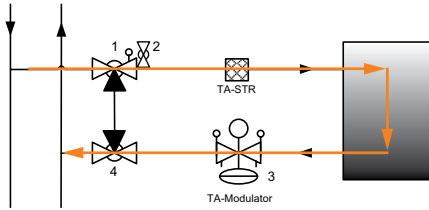


1. Open
2. Closed
3. Open
4. Open

Back flushing

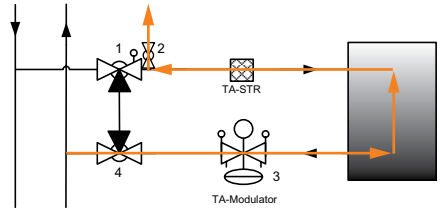


1. Closed
2. Open
3. Open
4. Open

Flushing the distribution system

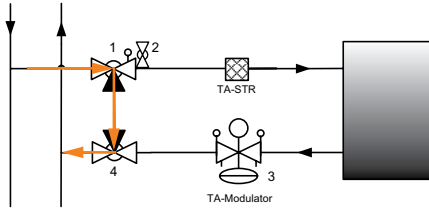


1. Closed
2. Closed
3. Open
4. Closed

Forward flushing

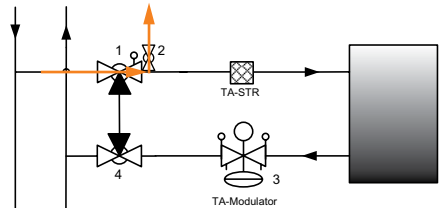


1. Open
2. Open
3. Closed
4. Open


Open






Closed








Flushing the distribution system









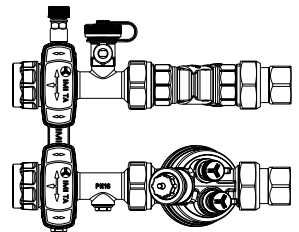


TA-Modulator / TA-COMPACT-P

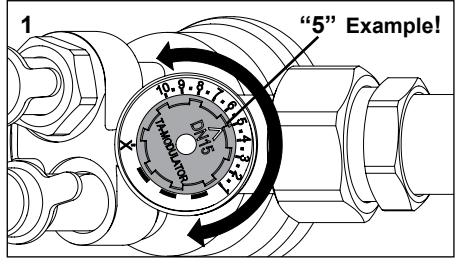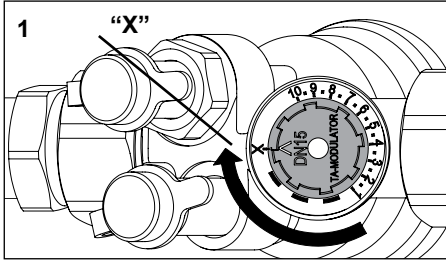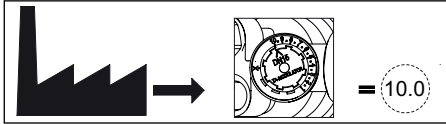

q



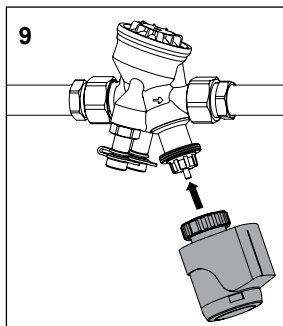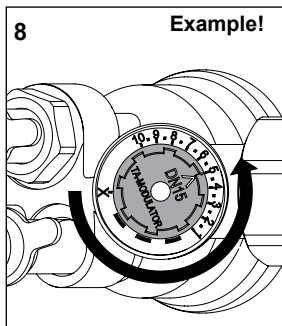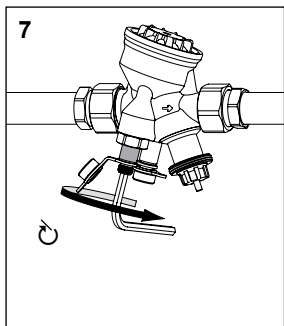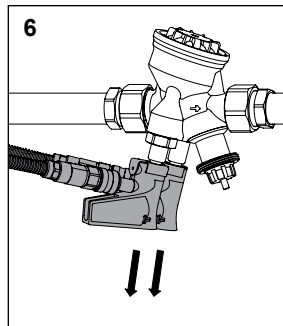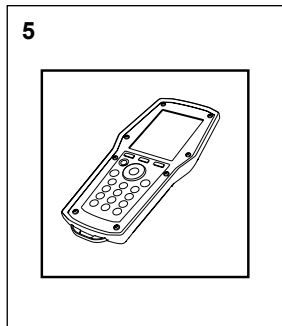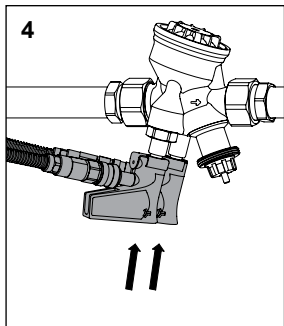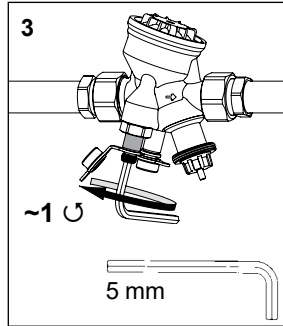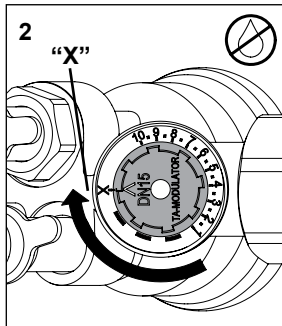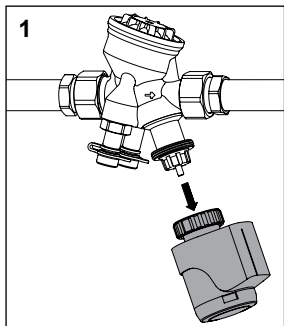

We reserve the right to introduce technical alterations without prior notice.