


IMI TA

TA-Slider 160 KNX TA-Slider 160 KNX R24



0°C - +50°C

32°F - +122°F

(5-95%RH, non-condensing)



0°C - +120°C

32°F - +248°F








-20°C - +70°C

-4°F - +158°F

(5-95%RH, non-condensing)



TA-Slider 160 KNX (TA-Slider 160 KNX R24)

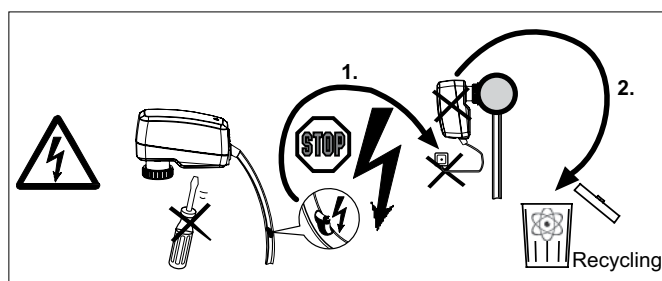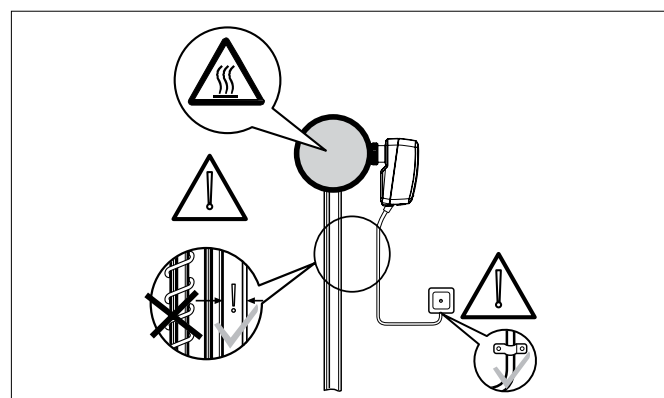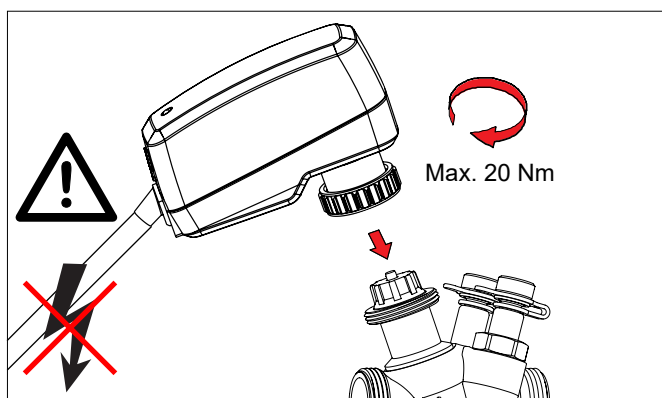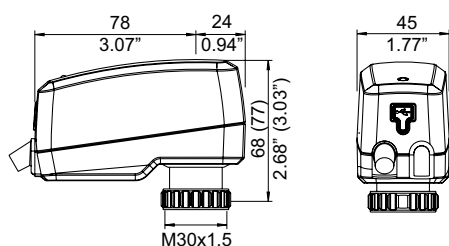


TA-Slider 160 KNX




TA-Slider 160 KNX R24



TA-Slider 160 KNX

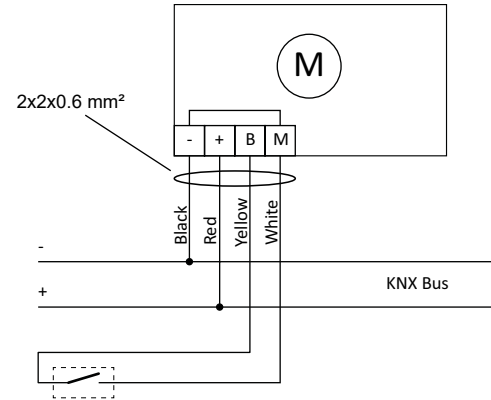



TA-Slider 160 KNX R24

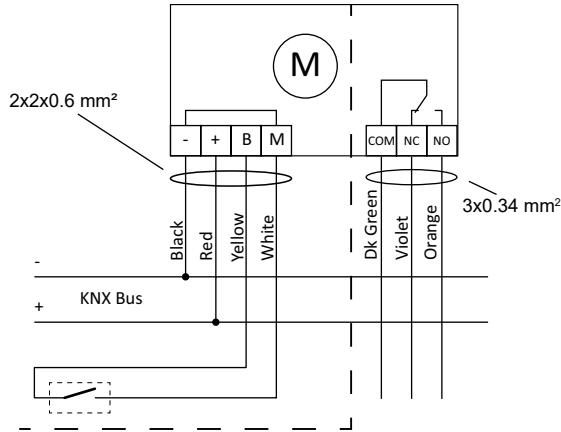

Note: M terminal is internally connected to KNX -.

Terminal	Description
M	Neutral
B	Connection for potential free contact (e.g. open window detection), max. 100 Ω, max. 10 m cable or shielded
COM	KNX R24 version: Common relay contact, max. 30 VAC/VDC, max. 2A on resistive load.
NC	Normally closed contact for relay
NO	Normally open contact for relay

Quick start

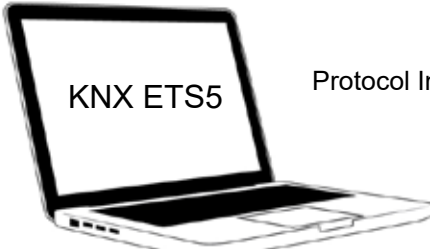


Protocol Implementation

climatecontrol.imiplc.com
→ TA-Slider 160

LED

BLUE/RED	LED

VIOLET	LED



LED