


IMI TA

TA-Slider 500 TA-Slider 500 I/O TA-Slider 500 Plus



0°C - +50°C

32°F - +122°F

(5-95%RH, non-condensing)



0°C - +120°C


32°F - +248°F







-20°C - +70°C


-4°F - +158°F

(5-95%RH, non-condensing)



TA-Slider 500 / 500 I/O (TA-Slider 500 Plus)

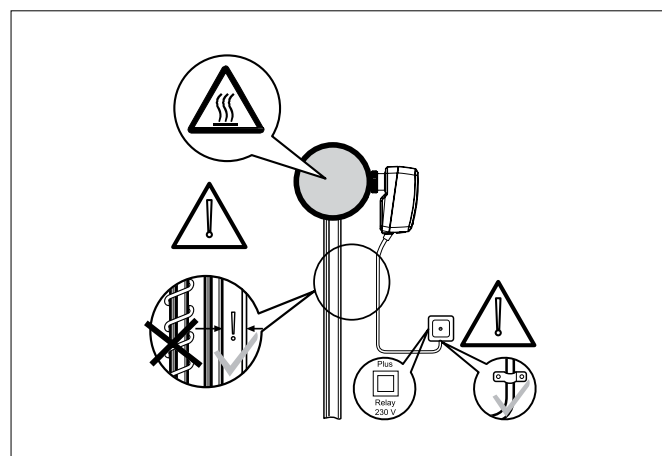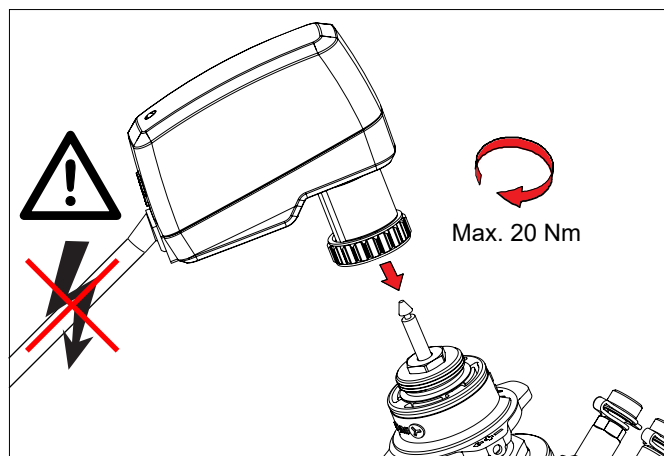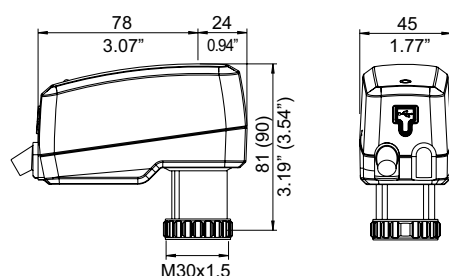

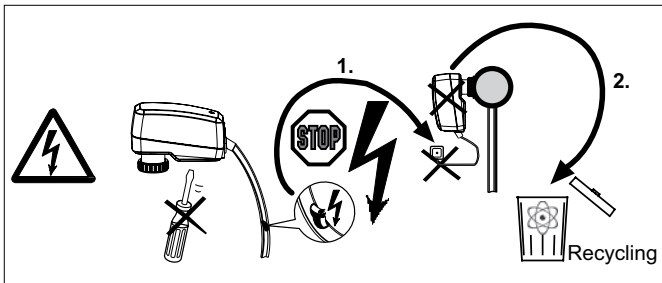


TA-Slider 500 / 500 I/O
24 VAC/VDC




TA-Slider 500 Plus
24 VAC/VDC




TA-Slider 500



TA-Slider 500 I/O

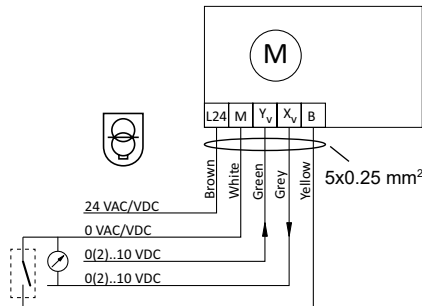


TA-Slider 500 Plus

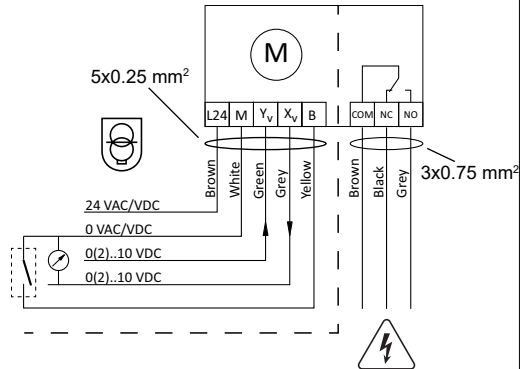

24 VAC/DC operating only with safety transformer according EN 61558-2-6

Terminal	Description
L24	Power supply 24 VAC/VDC
M	Neutral for power supply 24 VAC/VDC and signals
Y _v	Input signal for proportional control 0(2)..10 VDC, 47 kΩ
X _v	Output signal 0(2)..10 VDC, max. 8 mA or min. load resistance 1.25 kΩ
B	Connection for potential free contact (e.g. open window detection), max. 100 Ω, max. 10 m cable or shielded
COM	Common contacts of relay, max. 250 VAC, max. 5A @ 250 VAC on resistive load, max. 5A @ 30 VDC on resistive load
NC	Normally closed contact for relay
NO	Normally open contact for relay

Quick start

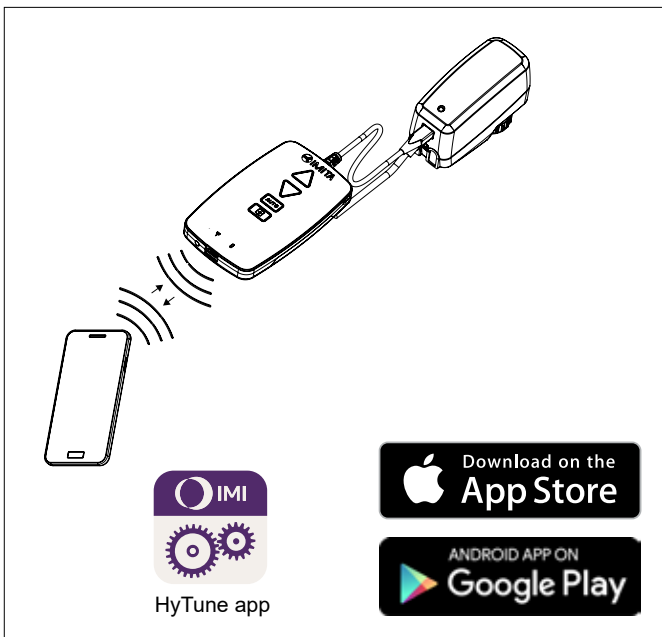

LED

