



4000114  
01.2023

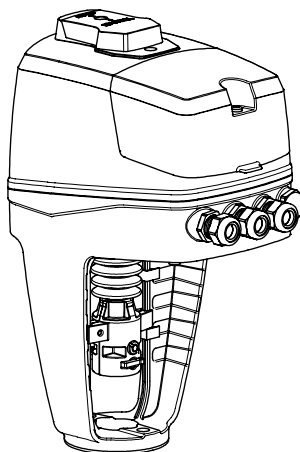

# TA-Slider 750/1600

## TA-Slider 750/1600 Plus

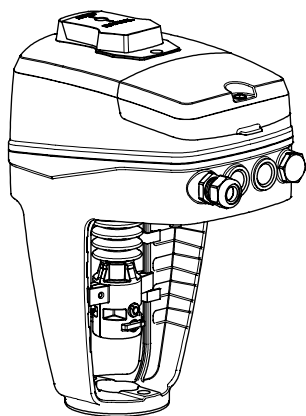



0°C - +50°C

32°F - +122°F

(5-95%RH, non-condensing)



0°C - +120°C

32°F - +248°F



-20°C - +70°C

-4°F - +158°F

(5-95%RH, non-condensing)



Input signal: 0-10 VDC

Output signal: 0-10 VDC

Speed: 3 s/mm (3, 4, 6, 8, 12 or 16 s/mm)

76.2 s/in (76.2, 101.6, 152.4, 203.2, 304.8 or 406.4 s/in)

Characteristic: Linear



Pollution degree 3



Class III EN 61000-6-6

Categ. 3 IEC 60730



230V

Plus version  
with Relay



24V

Plus version  
without Relay




EN 60730

Software  
**A**  
EN 60730




Type  
**1AB**  
EN 60730






**IP54**  
EN 60730



### TA-Slider 750/1600

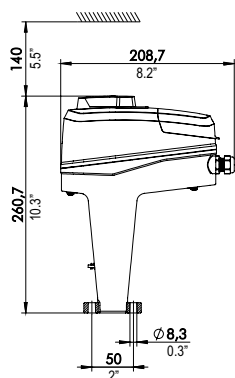


### TA-Slider 750/1600 Plus

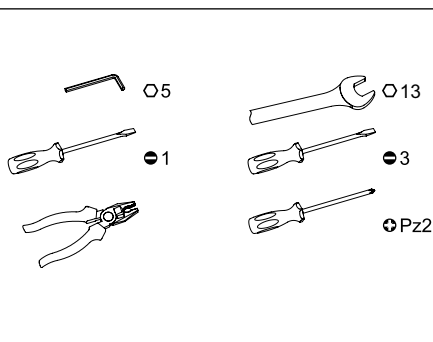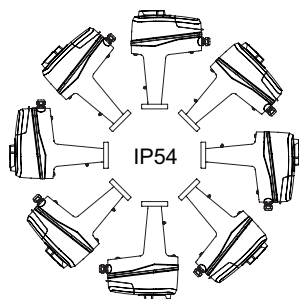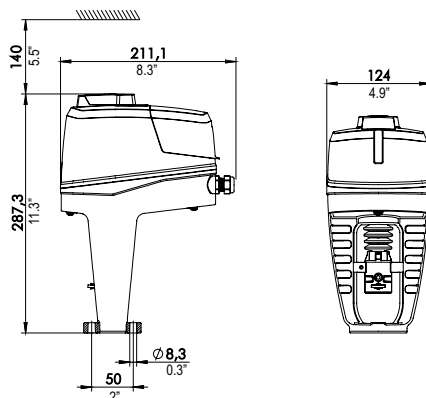

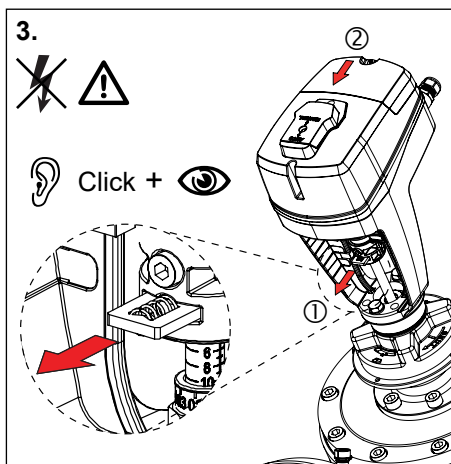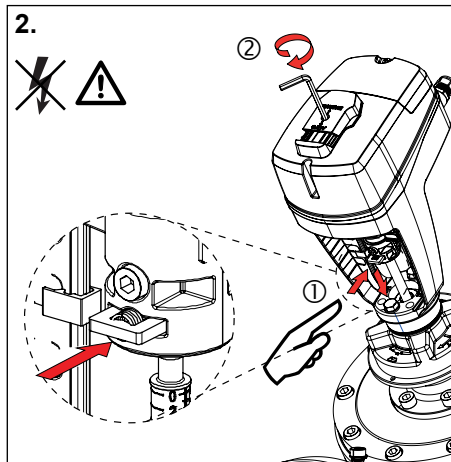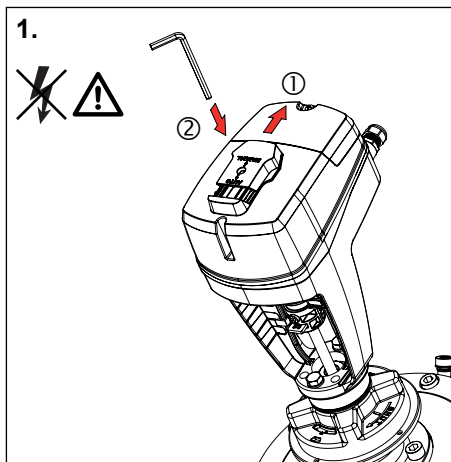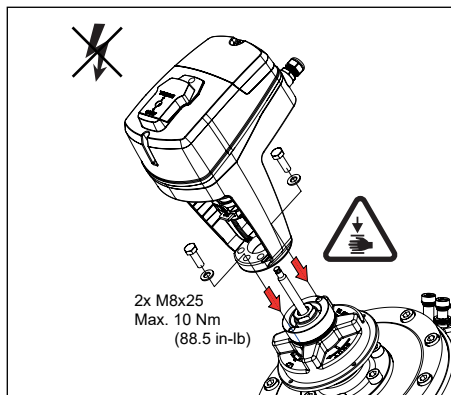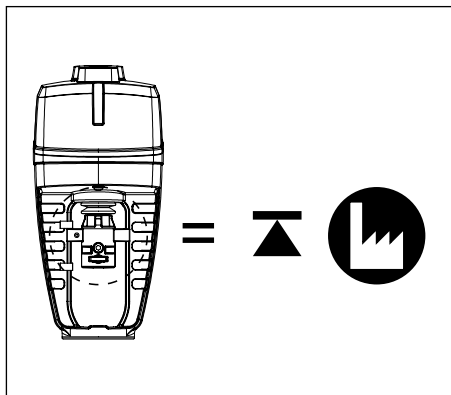




Example!




### TA-Slider 750/1600

24 V




100-240 V







### TA-Slider 750/1600 Plus

24 V









100-240 V

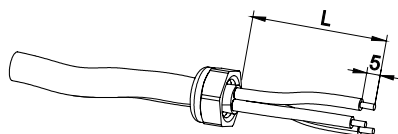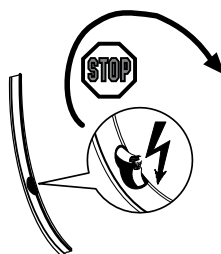

Protection class I: H05VV-F or similar  
 Protection class III: LiYY or similar  
 Wire cross-section: 0.25-2.0 mm<sup>2</sup>  
 (30 AWG-14 AWG)

L = 100 mm (3.94 in.)


Grounding wire L = 120 mm (4.72 in.)

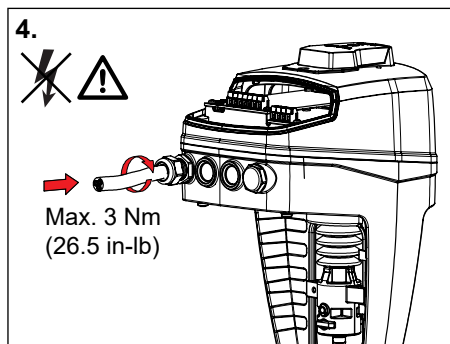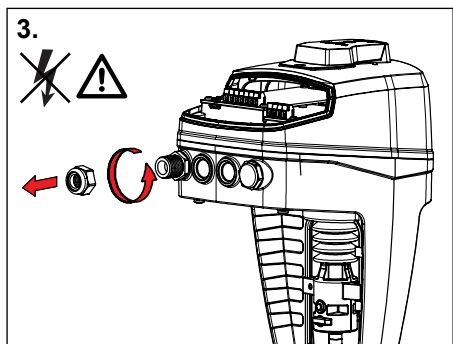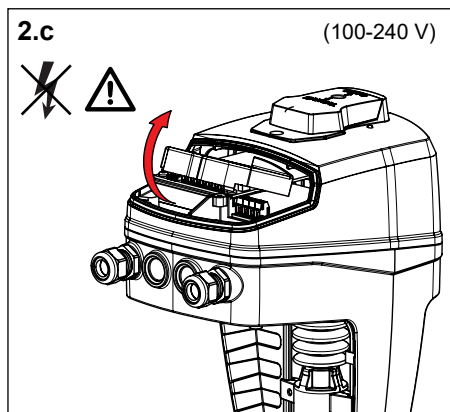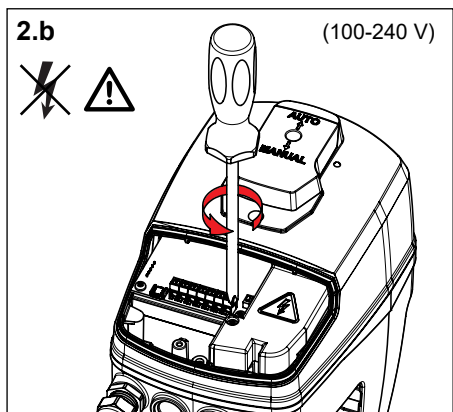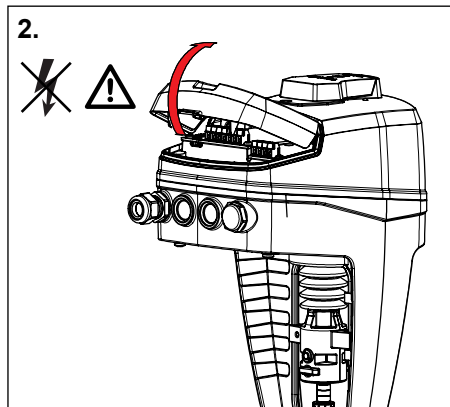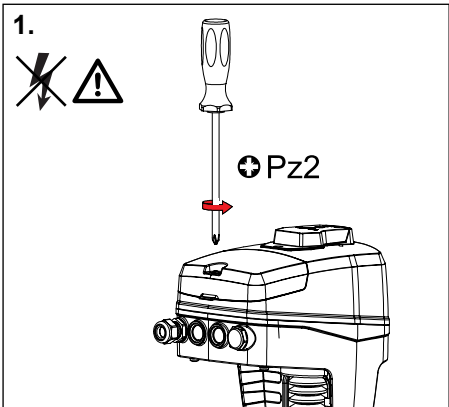

5.



**Note:** Only protection class I

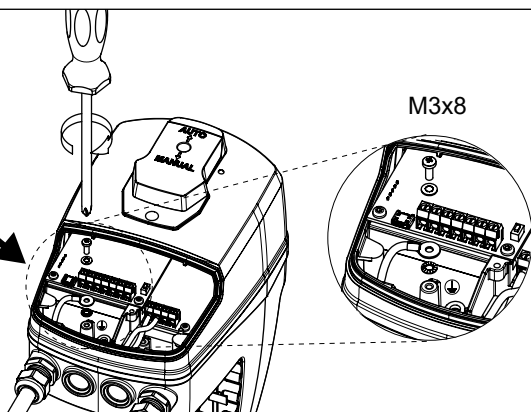


6.



⊕ Pz2


Max. 1.4 Nm  
(12.4 in-lb)

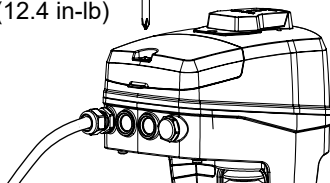


Terminal	Description
L24	Power supply 24 VAC/VDC
M*	Neutral for power supply 24 VAC/VDC and signals
L	Power supply 100-240 VAC
N	Neutral for power supply 100-240 VAC
Y <sub>i</sub>	Input signal for proportional control 0(4)..20 mA, 500 Ω
Y <sub>v</sub>	Input signal for proportional control 0(2)..10 VDC, 47 kΩ
X <sub>i</sub>	Output signal 0(4)..20 mA, max. resistance 700 Ω
X <sub>v</sub>	Output signal 0(2)..10 VDC, max. 8 mA or min. load resistance 1.25 kΩ
Dw	3-point control signal for extending actuator spindle (24 VAC/VDC or 100-240 VAC)
Up	3-point control signal for retracting actuator spindle (24 VAC/VDC or 100-240 VAC)
B	Connection for potential free contact (e.g. open window detection), max. 100 Ω, max. 10 m (32.8 ft) cable or shielded
COM1, COM2	Common contacts of relays 1 & 2, max. 250 VAC, max. 5A @ 250 VAC on resistive
NC1, NC2	Normally closed contacts for relay 1 & 2
NO1, NO2	Normally open contacts for relay 1 & 2

## 24 V


### 0(2)-10 V

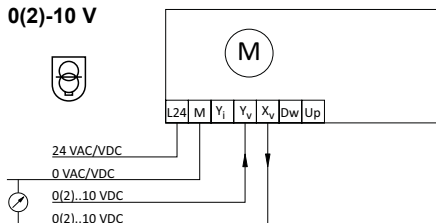


### 0(4)-20 mA

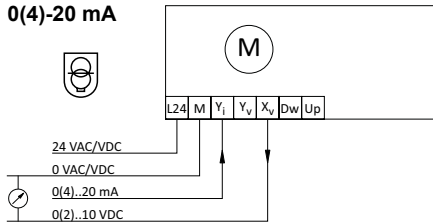

### 3-point

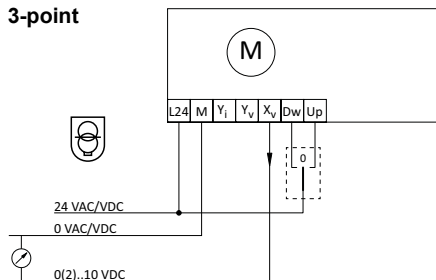


### On-off

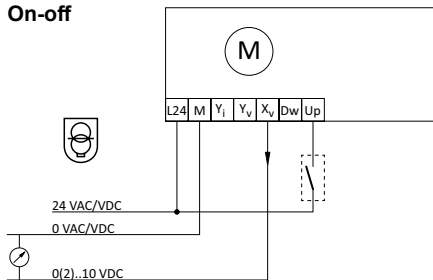


24 VAC/DC operating only with safety transformer according EN 61558-2-6

100-240 V


0(2)-10 V

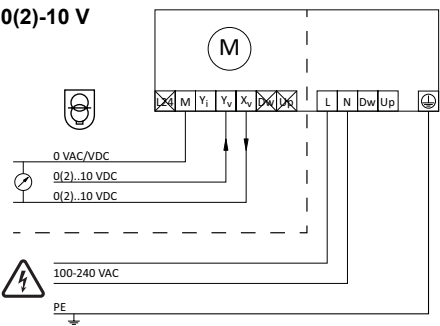


0(4)-20 mA

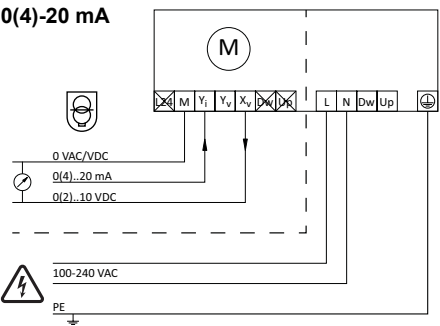

3-point

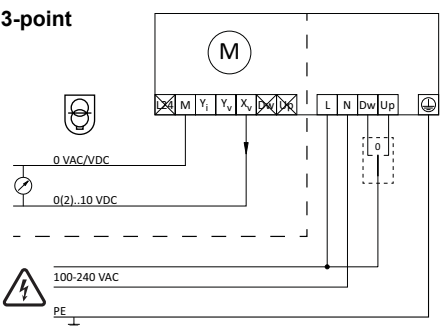


On-off

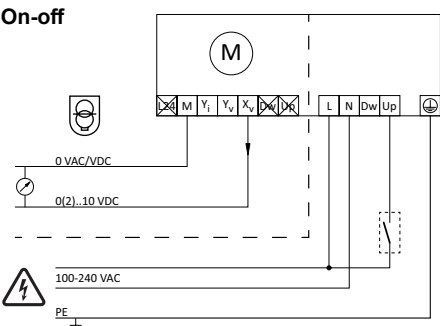

24 VAC/DC operating only with safety transformer according to EN 61558-2-6



## Relay (TA-Slider 750/1600 Plus)

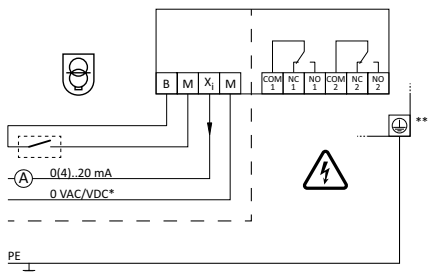


\*) Low voltage neutral


\*\*) Ground connection required.

## BUS (TA-Slider 750/1600 Plus)

### Ethernet (BACnet/IP, Modbus/TCP)







### RS 485 (BACnet MS/TP, Modbus RTU)

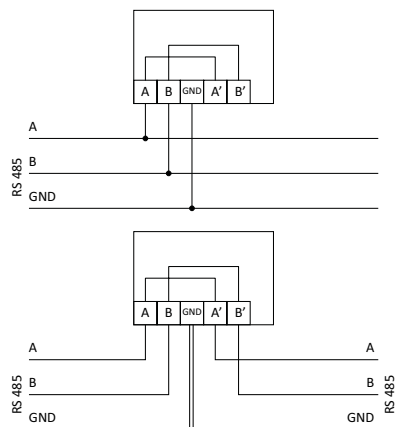





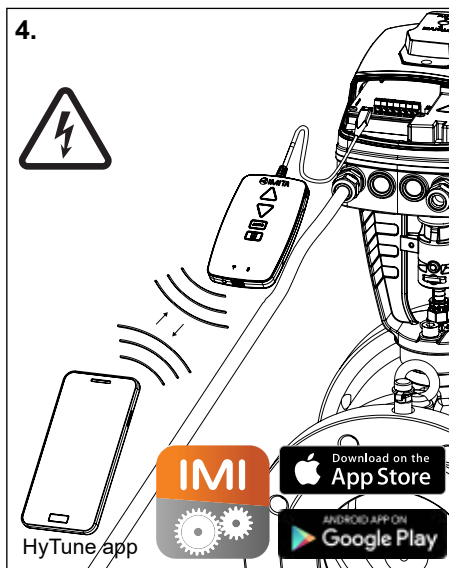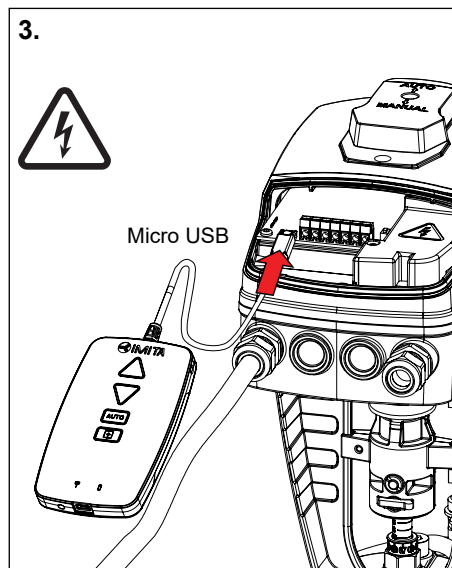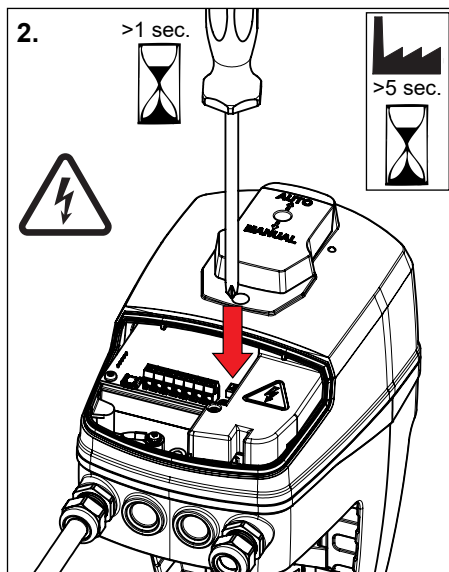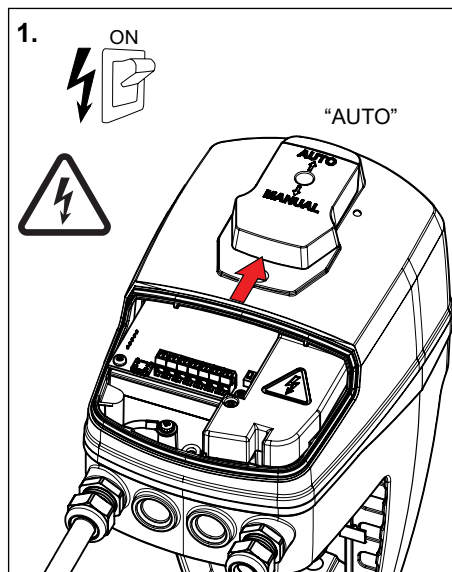


















**Note:** A, B, A', B' and GND terminals are isolated from all other terminals.

## Quick start



















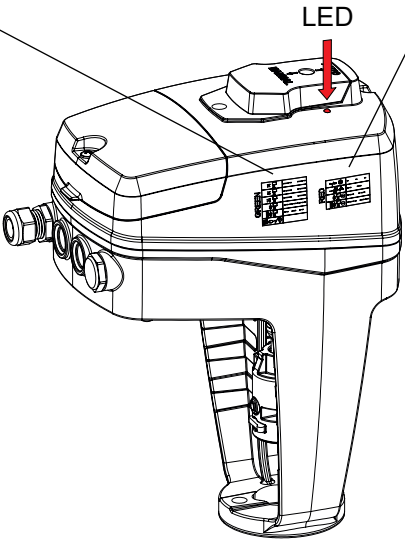
LED

GREEN

RED



*We reserve the right to introduce technical alterations without prior notice.*